

'21-'22

SL

EN

TEŽKO OPRAVILO

MOČNEJŠI TRAK







DUCT TAPES ..... 04

10 ..... MONTAŽNI TRAKOVI  
MOUNTING TAPES



TESNILNI TRAKOVI  
SEALING TAPES ..... 19

21 ..... TRAJNI PROMETNI IZDELKI  
DURABLE AIRTIGHT PRODUCTS



MASKIRNI TRAKOVI  
MASKING TAPES ..... 24

31 ..... VARNOSTNI IN OZNAČEVALNI TRAKOVI  
SAFETY AND MARKING



SPECIALNI TRAKOVI  
SPECIALTIES ..... 34

36 ..... IZOLACIJSKI TRAKOVI  
INSULATING TAPES



PAKIRNI TRAKOVI  
PACKAGING ..... 41

43 ..... LEPILNI TRAKOVI V BLISTER PAKIRNAJU  
TAPES IN BLISTER PACKS



NEBARVANI IZDELKI  
NON PAINT ARTICLES ..... 49

50 ..... PRIKAZI  
DISPLAYS



**HPX 6200 REPAIR TAPE**

- Zelo močan, univerzalni, visokokakovosten trak iz blaga z visoko lepilno trdnostjo
- Primerno za zavarovanje in popravilo cevi, vrtnih cevi itd.
- Lahko se strga ročno
- Vodoodporen in vremensko odporen
- Very strong, universal, high quality cloth tape with high adhesive strength
- Suitable for securing and repairing pipes, tubes, garden hoses, etc.
- Hand tearable
- Waterproof and weather resistant



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
CS5010	48 mm	10 m	silber/silver	12	5425014220537
CB5010	48 mm	10 m	schwarz/black	12	5425014220513
CS5025	48 mm	25 m	silber/silver	30	8711347114610
CB5025	48 mm	25 m	schwarz/black	30	8711347114573
CW5025	48 mm	25 m	weiß/white	30	5425014220018
CY5025	48 mm	25 m	gelb/yellow	30	5425014220674
CR5025	48 mm	25 m	rot/red	30	5425014220681
CL5025	48 mm	25 m	hellblau/light blue	30	5425014220698
CD5025	48 mm	25 m	dunkelblau/dark blue	30	5425014220704
CG5025	48 mm	25 m	olivgrün/olive green	30	5425014220711
CS5050	48 mm	50 m	silber/silver	18	8711347114634
CB5050	48 mm	50 m	schwarz/black	18	8711347114597
CS7550	75 mm	50 m	silber/silver	12	5425014224665
CB7550	75 mm	50 m	schwarz/black	12	5425014224740
CS10050	100 mm	50 m	silber/silver	12	5425014224764
CB10050	100 mm	50 m	schwarz/black	12	5425014222975

**Lepilna plast:** Naravna guma  
**Nosilni material:** Tkanina, prevlečena s PE  
**Temperaturna odpornost:** 60 ° C  
 (začasno do 80 ° C)  
**Natezna trdnost:** 183 N / 25 mm  
**Lepilna trdnost:** 13 N / 25 mm  
**Debeline** 0,30 mm

**Adhesive:** natural rubber  
**Carrier:** PE coated cloth  
**Maximum temperature:** 60°C (up to 80°C for short periods)  
**Tensile strength:** 183 N/25 mm  
**Adhesive strength:** 13 N/25 mm  
**Thickness:** 0,30 mm

**PRO DUCT TAPE ORANGE**

- Oranžni, univerzalni trak za popravilo
- Začasna pritrditev in popravilo
- Lahko se strga ročno
- Vodoodporen in vremensko odporen
- Orange, universal repair tape
- Suitable for temporary fixation and repairs
- Hand tearable
- Waterproof and weather resistant



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
EO4850	48 mm	50 m	orange/orange	24	5407004561370
EO5025	48 mm	25 m	orange/orange	36	5425014224603

**Lepilna plast:** sintetična guma  
**Nosilni material:** Tkanina, prevlečena s PE  
**Temperaturna odpornost:** 75 ° C  
**Natezna trdnost:** 95 N / 25 mm  
**Lepilna trdnost:** 24 N / 25 mm  
**Debeline** 0,20 mm

**Adhesive:** synthetic rubber  
**Carrier:** PE coated cloth  
**Maximum temperature:** 75°C  
**Tensile strength:** 95 N/25 mm  
**Adhesive strength:** 24 N/25 mm  
**Thickness:** 0,20 mm


**DUCT TAPE 2200**

- Vrhunski tkaninski trak z visoko lepilno trdnostjo
- Dober oprijem na večino površin
- Vsestranski: pakiranje, povezovanje, zapiranje, začasni popravek itd.
- Lahko se strga ročno
- Premium duct tape with high adhesion
- Good adhesion to most surfaces
- Versatile: packaging, bundling, sealing, temporary reparations
- Hand tearable

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
PD4825	48 mm	25 m	silber/silver	20	5425014225556
PD4850	48 mm	50 m	silber/silver	20	5425014225501
PE4850	48 mm	50 m	schwarz/black	20	5425014225266
PD7550	75 mm	50 m	silber/silver	12	5425014225525

**Lepilo:** naravna guma  
**Nosilni material:** Krpa s prevleko iz PE  
**Temperaturna odpornost:** 60 ° C  
 (do 70 ° C za kratek čas)  
**Natezna trdnost:** 147 N / 25 mm  
**Lepilna trdnost:** 11 N / 25 mm  
**Debelina:** 0,24 mm

**Adhesive:** natural rubber  
**Carrier:** PE coated cloth  
**Maximum temperature:** 60°C (up to 70°C for short periods)  
**Tensile strength:** 147 N/25 mm  
**Adhesive strength:** 11 N/25 mm  
**Thickness:** 0,24 mm

**DUCT TAPE 1900**

- Univerzalni lepilni trak
- Vsestranski: pakiranje, povezovanje, zapiranje, začasni popravek itd.
- Lahko se strga ročno
- Universal duct tape
- Versatile: packaging, bundling, sealing, temporary reparations
- Hand tearable

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
DC5050	48 mm	50 m	silber/silver	24	5425014223316
DC7550	75 mm	50 m	silber/silver	16	5425014224689

**Lepilo:** sintetična guma  
**Nosilni material:** Krpa s prevleko iz PE  
**Temperaturna odpornost:** 75 ° C  
**Natezna trdnost:** 75 N / 25 mm  
**Lepilna trdnost:** 20 N / 25 mm  
**Debelina:** 0,17 mm

**Adhesive:** synthetic rubber  
**Carrier:** PE coated cloth  
**Maximum temperature:** 75°C  
**Tensile strength:** 75 N/25 mm  
**Adhesive strength:** 20 N/25 mm  
**Thickness:** 0,17 mm



### GAFFER TAPE MATT BLACK

- Visokokakovostni krpni trak z mat črno površino
- Primerno za uporabo v studiih in gledališčih: brez odboja svetlobe
- Močan oprijem in odpornost na vremenske vplive
- Po daljšem času uporabe ne pušča ostankov lepila
- High quality cloth tape with a matt black surface
- Suitable for use in studios and theatres: no light reflection
- Strong adhesion and weather resistant
- Leaves no adhesive residues when being removed after long term use

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
GB5025	48 mm	25 m	mattschwarz/matt black	30	5425014220032
GB4850	48 mm	50 m	mattschwarz/matt black	18	5407004560939

**Lepilo:** naravna guma  
**Nosilni material:** Krpa s prevleko iz PE  
**Temperaturna odpornost:** 60 ° C  
 (do 80 ° C za kratek čas)  
**Natezna trdnost:** 157 N / 25 mm  
**Lepilna trdnost:** 10 N / 25 mm  
**Debelina:** 0,30 mm

**Adhesive:** natural rubber  
**Carrier:** PE coated cloth  
**Maximum temperature:** 60°C (up to 80°C for short periods)  
**Tensile strength:** 157 N/25 mm  
**Adhesive strength:** 10 N/25 mm  
**Thickness:** 0,30 mm

### MATT GAFFER TAPE PRO

- Visokokakovostni krpni trak z mat površino
- Primerno za uporabo v studiih in gledališčih: brez odboja svetlobe
- Močan oprijem in odpornost na vremenske vplive
- Po daljšem času uporabe ne pušča ostankov lepila
- High quality cloth tape with a matt surface
- Suitable for use in studios and theatres: no light reflection
- Strong adhesion and weather resistant
- Leaves no adhesive residues when being removed after long term use



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
YG2525	25 mm	25 m	mattgelb/matt yellow	36	n/a
YG5025	50mm	25 m	mattgelb/matt yellow	30	n/a
WG2525	25 mm	25 m	mattweiß/matt white	36	n/a
WG5025	50mm	25 m	mattweiß/matt white	30	n/a
SG2525	25 mm	25 m	mattsilber/matt silver	36	n/a
SG5025	50mm	25 m	mattsilber/matt silver	30	n/a
RG2525	25 mm	25 m	mattrot/matt red	36	n/a
RG5025	50mm	25 m	mattrot/matt red	30	n/a
AG2525	25 mm	25 m	mattblau/matt blue	36	n/a
AG5025	50mm	25 m	mattblau/matt blue	30	n/a
BG2525	25 mm	25 m	mattschwarz/matt black	36	n/a
BG5025	50mm	25 m	mattschwarz/matt black	30	n/a

**Lepilo:** naravna guma  
**Nosilni material:** Krpa s prevleko iz PE  
**Temperaturna odpornost:** 60 ° C  
 (do 80 ° C za kratek čas)  
**Natezna trdnost:** 245 N / 25 mm  
**Lepilna trdnost:** 10 N / 25 mm  
**Debelina:** 0,30 mm

**Adhesive:** natural rubber  
**Carrier:** PE coated cloth  
**Maximum temperature:** 60°C (up to 80°C for short periods)  
**Tensile strength:** 245 N/25 mm  
**Adhesive strength:** 10 N/25 mm  
**Thickness:** 0,30 mm




**GAFFER TAPE FLUO**

- Visokokakovostni krpni trak s fluo površino
- Primerno za uporabo v studiih in gledališčih: brez odboja svetlobe
- Močan oprijem in odpornost na vremenske vplive
- Po daljšem času uporabe ne pušča ostankov lepila

- High quality cloth tape with a fluo surface
- Suitable for use in studios and theatres: no light reflection
- Strong adhesion and weather resistant
- Leaves no adhesive residues when being removed after long term use

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
FR2525	25 mm	25 m	fluo rosa/fluo pink	60	n/a
FR5025	50mm	25 m	fluo rosa/fluo pink	30	n/a
FO2525	25 mm	25 m	fluo orange/fluo orange	60	n/a
FO5025	50mm	25 m	fluo orange/fluo orange	30	n/a
FG2525	25 mm	25 m	fluo grün/fluo green	60	n/a
FG5025	50mm	25 m	fluo grün/fluo green	30	n/a
FY2525	25 mm	25 m	fluo gelb/fluo yellow	60	n/a
FY5025	50mm	25 m	fluo gelb/fluo yellow	30	n/a

**Lepilo:** naravna guma

**Nosilni material:** Krpa s prevleko iz PE

**Temperaturna odpornost:** 60 ° C (do 80 ° C za kratek čas)

**Natezna trdnost:** 147 N / 25 mm

**Lepilna trdnost:** 8 N / 25 mm

**Debelina:** 0,30 mm

**Adhesive:** natural rubber

**Carrier:** PE coated cloth

**Maximum temperature:** 60°C (up to 80°C for short periods)

**Tensile strength:** 147 N/25 mm

**Adhesive strength:** 8 N/25 mm

**Thickness:** 0,30 mm


**FLUO GAFFER TAPE PRO**

- Visokokakovostni krpni trak z mat, fluo površino
- Primerno za uporabo v studiih in gledališčih: brez odboja svetlobe
- Močan oprijem in odpornost na vremenske vplive
- Po daljšem času uporabe ne pušča ostankov lepila

- High quality cloth tape with a matt, fluo surface
- Suitable for use in studios and theatres: no light reflection
- Strong adhesion and weather resistant
- Leaves no adhesive residues when being removed after long term use

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
YF2525	25 mm	25 m	fluo gelb/fluo yellow	36	n/a
YF5025	50mm	25 m	fluo gelb/fluo yellow	30	n/a
PF2525	25 mm	25 m	fluo rosa/fluo pink	36	n/a
PF5025	50mm	25 m	fluo rosa/fluo pink	30	n/a
OF2525	25 mm	25 m	fluo orange/fluo orange	36	n/a
OF5025	50mm	25 m	fluo orange/fluo orange	30	n/a
GF2525	25 mm	25 m	fluo grün/fluo green	36	n/a
GF5025	50mm	25 m	fluo grün/fluo green	30	n/a
BF2525	25 mm	25 m	fluo blau/fluo blue	36	n/a
BF5025	50mm	25 m	fluo blau/fluo blue	30	n/a

**Lepilo:** naravna guma

**Nosilni material:** Krpa s prevleko iz PE

**Temperaturna odpornost:** 60 ° C (do 80 ° C za kratek čas)

**Natezna trdnost:** 245 N / 25 mm

**Lepilna trdnost:** 10 N / 25 mm

**Debelina:** 0,30 mm

**Adhesive:** natural rubber

**Carrier:** PE coated cloth

**Maximum temperature:** 60°C (up to 80°C for short periods)

**Tensile strength:** 245 N/25 mm

**Adhesive strength:** 10 N/25 mm

**Thickness:** 0,30 mm


**GAFFER 6000 TAPE 'SOUND AND LIGHT'**

- Najkakovostnejši lepilni trak
- Avdiovizualne aplikacije: idealno za pritrnitev in lepljenje cevi in kablov
- Visoka lepilna trdnost, ročno uporabna
- Po daljšem času uporabe ne pušča ostankov lepila
- Highest quality Gaffer Tape
- Audiovisual applications: ideal for securing and taping up tubes and cables
- High adhesive strength, hand tearable
- Easy to remove, does not leave any residues

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
AB1950	19 mm	50 m	schwarz/black	48	5425014224337
AB2550	25 mm	50 m	schwarz/black	36	5425014224351
AB3850	38 mm	50 m	schwarz/black	24	5425014223552
AB5025	50 mm	25 m	schwarz/black	30	5425014223491
AB5050	50 mm	50 m	schwarz/black	18	5425014223194
AB10050	100 mm	50 m	schwarz/black	12	5425014223873
AW1950	19 mm	50 m	weiß/white	48	5425014223774
AW2550	25 mm	50 m	weiß/white	36	5425014224498
AW3850	38 mm	50 m	weiß/white	24	5425014223590
AW5025	50 mm	25 m	weiß/white	30	5425014223538
AW5050	50 mm	50 m	weiß/white	18	5425014223408
AW10050	100 mm	50 m	weiß/white	12	5425014224535

**Lepilo:** naravna guma  
**Nosilni material:** Krpa s prevleko iz PE  
**Temperaturna odpornost:** 60 ° C  
 (do 80 ° C za kratek čas)  
**Natezna trdnost:** 195 N / 25 mm  
**Lepilna trdnost:** 9 N / 25 mm  
**Debelina:** 0,30 mm

**Adhesive:** natural rubber  
**Carrier:** PE coated cloth  
**Maximum temperature:** 60°C (up to 80°C for short periods)  
**Tensile strength:** 195 N/25 mm  
**Adhesive strength:** 9 N/25 mm  
**Thickness:** 0,30 mm

**ALL WEATHER TAPE**


- Neopazna ojačitev in popravilo razbitega stekla, rastlinjakov in platen
- Primerno za vse vremenske razmere
- UV odporen
- Lahko se strga ročno
- Primerno za večino vrst podlage, vključno s PVC in PE
- Inconspicuous reinforcement and repair of broken glass, greenhouses and canvases
- Suitable for all weather conditions
- UV resistant
- Hand tearable
- Suitable for most types of substrates, including PVC and PE

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
AT4805	48 mm	5 m	transparent/transparent	24	5425014228199
AT4825	48 mm	25 m	transparent/transparent	36	5425014228205

**Lepilo:** akril  
**Nosilni material:** polietilen  
**Temperaturna odpornost:** 80 ° C  
**Natezna trdnost:** 39 N / 25 mm  
**Lepilna trdnost:** 10 N / 25 mm  
**Debelina:** 0,17 mm

**Adhesive:** acrylic  
**Carrier:** polyethylene  
**Maximum temperature:** 80°C  
**Tensile strength:** 39 N/25 mm  
**Adhesive strength:** 10 N/25 mm  
**Thickness:** 0,17 mm

**AGRITAPE**

- Vodoodbojni PVC trak z visoko lepilno močjo
- Lepi se tudi na mokri podlagi
- Za popravilo kmetijske plastike in folije, povezovanje in označevanje kablov, električne izolacije, ...
- Zelo elastičen in raztegljiv, zato se ne bo zlahka strgal ali zlomil
- Negorljiv
- UV odporen
- Lahko se strga ročno



- Water-repellent PVC tape with high adhesive power
- Adheres even on wet surfaces
- For repairing agricultural plastic and film, bundling and labeling of cables, electrical insulation, ...
- Very elastic and stretchable, will therefore not tear or break easily
- Flame retardant
- UV resistant
- Hand tearable

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
KB5010	50 mm	10 m	schwarz/black	48	5407004561059
KW5010	50 mm	10 m	weiß/white	48	5407004561097
KB10010	100 mm	10 m	schwarz/black	24	5407004561073
KW10010	100 mm	10 m	weiß/white	24	5407004561110

**Lepilo:** guma  
**Nosilni material:** PVC  
**Temperaturna odpornost:** 80 °C  
**Natezna trdnost:** 45 N / 25 mm  
**Lepilna trdnost:** 2,5 N / 25 mm  
**Debelina:** 0,18 mm

**Adhesive:** rubber  
**Carrier:** PVC  
**Maximum temperature:** 80°C  
**Tensile strength:** 45 N/25 mm  
**Adhesive strength:** 2,5 N/25 mm  
**Thickness:** 0,18 mm



### MAX POWER TRANSPARENT



- Dvostranski, 100% prozoren, močan akrilni trak
- Zelo primeren za montažo vseh vrst predmetov
- Dober oprijem na kovino, steklo in večino plastike
- Primerno za velike obremenitve
- Odporen na vlago
- Za notranjo in zunanjo uporabo
- Zamenja vijake, slepe zakovice, varilna in tekoča lepila

- Double sided, 100% transparent, high strength acrylic tape
- Highly suitable for mounting all types of objects
- Good adhesion to metal, glass and most plastics
- Suitable for heavy loads
- Resistant to moisture
- For both indoor and outdoor use
- Replaces screws, blind rivets, welding and liquid glues

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
HT1902	19 mm	2 m	transparent/transparent	20	5425014224627
HT1905	19 mm	5 m	transparent/transparent	20	5425014229745
HT1916	19 mm	16,5 m	transparent/transparent	10	5425014223897

**Lepilo:** akril  
**Nosilni material:** akrilna pena  
**Temperaturna odpornost:** 93 ° C  
 (do 150 ° C za kratek čas)  
**Lepilna trdnost:** 29 N / 25 mm  
**Debelina:** 1,00 mm

**Adhesive:** acrylic  
**Carrier:** acrylic foam  
**Maximum temperature:** 93°C (up to 150°C for short periods)  
**Adhesive strength:** 29 N/25 mm  
**Thickness:** 1,00 mm

### MAX POWER OUTDOOR



- Dvostranski akrilni trak z zelo visoko lepilno trdnostjo
- Zelo primeren za namestitvev različnih vrst predmetov
- Dober oprijem na kovino, steklo in večino plastike
- Primerno za velike obremenitve
- Odporen na vlago
- Za notranjo in zunanjo uporabo
- Zamenja vijake, slepe zakovice, varilna in tekoča lepila

- Double sided acrylic tape with very high adhesive strength
- Highly suitable for mounting different kinds of objects
- Good adhesion to metal, glass and most plastics
- Suitable for heavy loads
- Resistant to moisture
- For both indoor and outdoor use
- Replaces screws, blind rivets, welding and liquid glues

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
OT2502	25 mm	1,5 m	schwarz/black	20	5425014226850
OT1905	19 mm	5 m	schwarz/black	20	5425014229868
OT1916	19 mm	16,5 m	schwarz/black	10	5425014229882

**Lepilo:** akril  
**Nosilni material:** akrilna pena  
**Temperaturna odpornost:** 93 ° C  
 (do 150 ° C za kratek čas)  
**Lepilna trdnost:** 47 N / 25 mm  
**Debelina:** 1,10 mm

**Adhesive:** acrylic  
**Carrier:** acrylic foam  
**Maximum temperature:** 93°C (up to 150°C for short periods)  
**Adhesive strength:** 47 N/25 mm  
**Thickness:** 1,10 mm



### HSA HIGH STRENGTH ACRYLIC 3200

- Dvostranski akrilni trak z zelo visoko lepilno trdnostjo
- Posebej zasnovan za (težke) obrobe, znake, ojačevalce itd.
- Dober oprijem na kovino, steklo in večino plastike
- Odporen na topila
- Prestavljivo
- Zamenja vijake, slepe zakovice, varilna in tekoča lepila
- Double sided acrylic tape with very high adhesive strength
- Specially designed for (heavy) trims, signs, strengtheners, etc.
- Good adhesion to metal, glass and most plastics
- Solvent resistant
- Repositionable
- Replaces screws, blind rivets, welding and liquid glues

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
HSA002	6 mm	10 m	anthrazit/anthracite	10	5425014221596
HSA003	9 mm	10 m	anthrazit/anthracite	10	8711347114269
HSA004	12 mm	10 m	anthrazit/anthracite	10	8711347114283
HSA005	19 mm	10 m	anthrazit/anthracite	10	8711347114306
HSA006	25 mm	10 m	anthrazit/anthracite	10	5425014221602

**Lepilo:** akril  
**Nosilni material:** akrilna pena  
**Temperaturna odpornost:** 93 °C (do 150 °C za kratek čas)  
**Lepilna trdnost:** 47 N / 25 mm  
**Debelina:** 1,10 mm

**Adhesive:** acrylic  
**Carrier:** acrylic foam  
**Maximum temperature:** 93°C (up to 150°C for short periods)  
**Adhesive strength:** 47 N/25 mm  
**Thickness:** 1,10 mm



### SIDE MOULDING TAPE

- Dvostranski penasti trak z visoko lepilno trdnostjo
- S tehnologijo MSE
- Zelo dober oprijem na prozorno prevleko in plastiko
- Primerno za namestitve vseh vrst predmetov, kot so: okrasne letve, znaki itd
- Vremensko odporen, primeren za dolgotrajno uporabo na prostem
- Dober oprijem na kovino, steklo in večino plastike
- odporen na topila
- Double sided foam tape with high adhesive strength
- With MSE-technology
- Very good adhesion to clear coating and plastics
- Suitable for mounting all kinds of objects, such as: trims, signs, etc.
- Weather resistant, suitable for long term outdoor use
- Good adhesion to metal, glass and most plastics
- Solvent resistant

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
ZC03	9 mm	10 m	schwarz/black	10	8711347300006
ZC04	12 mm	10 m	schwarz/black	10	8711347400003
ZC05	19 mm	10 m	schwarz/black	10	8711347500000
ZC06	25 mm	10 m	schwarz/black	10	8711347600007

**Lepilo:** akril  
**Nosilni material:** polietilenska pena  
**Temperaturna odpornost:** 120 °C  
**Lepilna trdnost:** 25 N / 25 mm  
**Debelina:** 1,00 mm

**Adhesive:** acrylic  
**Carrier:** polyethylene foam  
**Maximum temperature:** 120°C  
**Adhesive strength:** 25 N/25 mm  
**Thickness:** 1,00 mm

**MIRROR MOUNTING TAPE**

- Dvostranski pritrdilni trak
- Še posebej primeren za namestitve ogledal, kljuk, kablskih kanalov itd.
- Za notranjo in zunanjo uporabo
- Ustrezne podlage so steklo, les, kovina in umetne mase
- Za vsak kilogram zrcalne teže je priporočljivo uporabiti 65 cm<sup>2</sup> traku
- Dober oprijem na kovino, steklo in večino plastike
- odporen na topila

- Double sided mounting tape
- Especially suitable for fitting mirrors, hooks, cable ducts, etc.
- For indoor and outdoor use
- Suitable substrates are glass, wood, metal and plastics
- For each kilo of mirror weight, it is recommended to use 65 cm<sup>2</sup> of tape



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
DS1905	19 mm	5 m	weiß/white	24	5425014220124
DS1925	19 mm	25 m	weiß/white	10	5425014222531

**Lepilo:** akril  
**Nosilni material:** polietilenska pena  
**Temperaturna odpornost:** 120 ° C  
**Lepilna trdnost:** 20 N / 25 mm  
**Debelina:** 1,10 mm

**Adhesive:** acrylic  
**Carrier:** polyethylene foam  
**Maximum temperature:** 120°C  
**Adhesive strength:** 20 N/25 mm  
**Thickness:** 1,10 mm

**DOUBLE SIDED MOUNTING TAPE 3MM**

- Dvostranski penasti trak
- Primerno za pritrnitev vseh vrst predmetov, npr. plošč
- Dobro se prilega nepravilnim površinam
- Visoka začetna lepljivost zaradi lepljenja iz sintetične gume

- Double sided foam tape
- Suitable for the fixation of all kinds of objects, e.g. panels
- Fits well to irregular surfaces
- High initial tack thanks to the synthetic rubber glueing



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
DA1225	12 mm	25 m	anthrazit/anthracite	20	5425014223910
DW1925	19 mm	25 m	weiß/white	12	5425014223934

**Lepilo:** sintetična guma  
**Nosilni material:** polietilenska pena  
**Temperaturna odpornost:** 80 ° C  
**Lepilna trdnost:** 25 N / 25 mm  
**Debelina:** 3,00 mm

**Adhesive:** synthetic rubber  
**Carrier:** polyethylene foam  
**Maximum temperature:** 80°C  
**Adhesive strength:** 25 N/25 mm  
**Thickness:** 3,00 mm

**DOUBLE SIDED MOUNTING TAPE**

- Dvostranski penasti trak z visoko lepilno trdnostjo
- Primerno za trajno pritrjevanje vseh vrst predmetov
- Lepi se na nepravilnih površinah
- Notranja in zunanja uporaba

- Double sided foam tape with high adhesive strength
- Suitable for permanent fixation of all kinds of objects
- Adheres to irregular surfaces
- Indoor and outdoor use



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
MW1950	19 mm	50 m	weiß/white	12	5425014229349

**Lepilo:** naravna guma  
**Nosilni material:** polietilenska pena  
**Temperaturna odpornost:** 60 ° C  
**Lepilna trdnost:** 16 N / 25 mm  
**Debelina:** 1,10 mm

**Adhesive:** natural rubber  
**Carrier:** polyethylene foam  
**Maximum temperature:** 60°C  
**Adhesive strength:** 16 N/25 mm  
**Thickness:** 1,10 mm



### DOUBLE SIDED MOUNTING TAPE BLACK



- Dvostranski penasti trak z visoko lepilno trdnostjo
- Primerno za trajno pritrjevanje vseh vrst predmetov
- Dober oprijem na steklo, les, kovino in večino plastike
- Notranja in zunanja uporaba
- odporen na UV in topila
- Double sided foam tape with high adhesive strength
- Suitable for permanent fixation of all kinds of objects
- Good adhesion to glass, wood, metal and most plastics
- Indoor and outdoor use
- UV and solvent resistant

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
DM1210	12 mm	10 m	schwarz/black	20	5425014223958
DM1910	19 mm	10 m	schwarz/black	24	5425014223972
DM1950	19 mm	50 m	schwarz/black	12	5425014223996

**Lepilo:** plast akril  
**Nosilni material:** Polietilenska pena  
**Temperaturna odpornost:** 120 ° C  
**Lepilna trdnost:** 20 N / 25 mm  
**Debelina:** 0,95 mm

**Adhesive:** acrylic  
**Carrier:** polyethylene foam  
**Maximum temperature:** 120°C  
**Adhesive strength:** 20 N/25 mm  
**Thickness:** 0,95 mm

### ULTRA MOUNT TAPE



- Prozoren, dvostranski lepilni trak z visoko lepilno trdnostjo
- Zelo odporen na vlago, UV in visoke temperature
- Za namestitev imenskih ploščic, trakov itd.
- Primerno za ABS, poliester in EPDM
- Transparent, double sided adhesive tape with high adhesive strength
- Very resistant to moisture, UV and high temperatures
- For fitting name plates, strips, etc.
- Suitable for ABS, polyester and EPDM

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
UM1910	19 mm	10 m	transparent/transparent	20	5425014226119
UM1950	19 mm	50 m	transparent/transparent	10	5425014220247

**Lepilo:** Akrilno topilo  
**Nosilni material:** Poliestrski film  
**Temperaturna odpornost:** 100 ° C  
 (začasno do 200 ° C)  
**Lepilna trdnost:** 24 N / 25 mm  
**Debelina:** 0,20 mm

**Adhesive:** solvent acrylic  
**Carrier:** polyester film  
**Maximum temperature:** 100°C (up to 200° C for short periods)  
**Adhesive strength:** 24 N/25 mm  
**Thickness:** 0,20 mm



### MULTI TACK DOUBLE SIDED MOUNTING TAPE

- Popolnoma primeren za hitro in enostavno pritrditev podstavkov, poštnih predalov, plošč, ploščic itd.
- Močan dvostranski lepilni trak za notranjo in zunanjo uporabo; primeren za gladke, hrapave in porozne površine
- Pritrditev brez žbljev ali vijakov
- Z ojačano tkanino
- Primerno tudi za dekorativne okraske, okvirje iz poliuretana in polistirenske pene
- Dober oprijem na termoplastiko, umetne mase, pa tudi PE in PP
- Perfect for fast and easy mounting of baseboards, letterboxes, sheet material, tiles, etc.
- Extra strong, double sided mounting tape for indoor and outdoor use, suitable for smooth, rough and porous surfaces
- Mounting without nails or screws
- With reinforced fabric
- Also suitable for decorative ornaments and frames made of polyurethane and polystyrene foam
- Good adhesion on LSE plastics such as PE and PP

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
PA1925	19 mm	25 m	semi-transp./semi-transp.	10	5407004562056

**Lepilo:** sintetična guma  
**Nosilni material:** Poliestrski film  
**Temperaturna odpornost:** 75 ° C  
**Lepilna trdnost:** 55 N / 25 mm  
**Debelina:** 0,80 mm

**Adhesive:** synthetic rubber  
**Carrier:** polyester film  
**Maximum temperature:** 75°C  
**Adhesive strength:** 55 N/25 mm  
**Thickness:** 0,80 mm

### MULTI TACK DOUBLE SIDED MOUNTING TAPE - LED PROFILE

- Popolnoma primeren za hitro in enostavno pritrditev LED profilov
- Močan dvostranski lepilni trak za notranjo in zunanjo uporabo; primeren za gladke, hrapave in porozne površine
- Pritrditev brez žbljev ali vijakov
- Z ojačano tkanino
- Dober oprijem na termoplastiko, umetne mase, pa tudi PE in PP
- Perfect for fast and easy mounting of LED-profiles
- Extra strong, double sided mounting tape for indoor and outdoor use, suitable for smooth, rough and porous surfaces
- Mounting without nails or screws
- With reinforced fabric
- Good adhesion on LSE plastics such as PE and PP

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
PA1205	12 mm	5 m	semi-transp./semi-transp.	10	5407004563336
PA1225	12 mm	25 m	semi-transp./semi-transp.	10	5407004563060

**Lepilo:** sintetična guma  
**Nosilni material:** Poliestrski film  
**Temperaturna odpornost:** 75 ° C  
**Lepilna trdnost:** 55 N / 25 mm  
**Debelina:** 0,80 mm

**Adhesive:** synthetic rubber  
**Carrier:** polyester film  
**Maximum temperature:** 75°C  
**Adhesive strength:** 55 N/25 mm  
**Thickness:** 0,80 mm

### DOUBLE SIDED CARPET TAPE



- Preprožni trak iz blaga
- Primerno za večino vrst preprog
- Zelo visoka lepilna trdnost
- Primerno za grobe površine
- Lahko se strga ročno

- Carpet tape manufactured from cloth
- Suitable for most types of carpet
- Very high adhesive strength
- Suitable for rough surfaces
- Hand tearable

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
CT5025	50 mm	25 m	weiß/white	24	5425014224054

**Lepilo:** sintetična guma  
**Nosilni material:** Bombažna tkanina  
**Temperaturna odpornost:** 60 ° C  
**Natezna trdnost:** 80 N / 25 mm  
**Lepilna trdnost:** 27 N / 25 mm  
**Debelina:** 0,24 mm

**Adhesive:** synthetic rubber  
**Carrier:** cotton cloth  
**Maximum temperature:** 60°C  
**Tensile strength:** 80 N/25 mm  
**Adhesive strength:** 27 N/25 mm  
**Thickness:** 0,24 mm

### DOUBLE SIDED TAPE



- Dvostranski film lepilni trak
- Primerno za pritržitev preprog in talnih oblog
- Za splošno uporabo

- Double sided tape manufactured from film
- Universal use
- Suitable for fixation of carpets and floor coverings

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
CE5025	50 mm	25 m	weiß/white	24	5425014225440

**Lepilo:** sintetična guma  
**Nosilni material:** Polipropilenski film  
**Temperaturna odpornost:** 60 ° C  
**Lepilna trdnost:** 14 N / 25 mm  
**Debelina:** 0,08 mm

**Adhesive:** synthetic rubber  
**Carrier:** polypropylene film  
**Maximum temperature:** 60°C  
**Adhesive strength:** 14 N/25 mm  
**Thickness:** 0,08 mm

### DOUBLE SIDED TISSUE TAPE



- Primerno za lepljenje, tesnjenje posod in ovojníc, pritrjevanje fotografij, laminiranje s peno itd.
- Lahko se uporablja za prikaze POS Katalog
- Velika lepilna sila
- Lahko se strga ročno

- Suitable for general bonding, bag sealing, photo sticking, envelop sealing, foam lamination, etc.
- Application of point-of-sales displays
- High tack
- Hand tearable

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
TT1950	19 mm	50 m	weiß/white	65	5407004562131

**Lepilo:** sintetična guma  
**Nosilni material:** Bombažna tkanina  
**Temperaturna odpornost:** 60 ° C  
**Lepilna trdnost:** 29 N / 25 mm  
**Debelina:** 0,10 mm

**Adhesive:** synthetic rubber  
**Carrier:** cotton cloth  
**Maximum temperature:** 60°C  
**Adhesive strength:** 29 N/25 mm  
**Thickness:** 0,10 mm



### EXPO CARPET TAPE



- Primerno za lepljenje, tesnjenje posod in ovojníc, pritrjevanje fotografij, laminiranje s peno itd.
- Lahko se uporablja za prikaze POS Katalog
- Velika lepilna sila
- Lahko se strga ročno

- Carpet tape manufactured from cloth
- For temporary use at trade fairs and events
- Removable without any residue on most surfaces
- Suitable for most types of carpet
- Suitable for rough surfaces
- Hand tearable

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
EX3825	38 mm	25 m	transparent/transparent	30	5425014229387

**Lepilo:** sintetična guma  
**Nosilni material:** Bombažna tkanina  
**Temperaturna odpornost:** 75 ° C  
**Lepilna trdnost:** 10 N / 25 mm - 20 N / 25 mm  
**Debelina:** 0,23 mm

**Adhesive:** synthetic rubber  
**Carrier:** cotton cloth  
**Maximum temperature:** 75°C  
**Adhesive strength:** 10 N/25 mm - 20 N/25mm  
**Thickness:** 0,23 mm

### EMBLEM PRESS & MOUNT



- Inovativni lepilni trakovi za ponovno uporabo emblemov
- Cenejša in prihranek časa alternativa ponovnemu nakupu emblemov
- Trajni oprijem
- Vremensko odporen
- Odporen na avtopralnice
- 5 listov na kuverto

- Innovative glue strip for the replacement of emblems
- Cheaper and time-saving alternative to the repurchase of emblems
- Permanent adhesion
- Weather resistant
- Car wash resistant
- 5 sheets per envelope

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
EP1020	100 mm	200 mm	transparent/transparent	50	5425014225822

**Lepilo:** akril  
**Temperaturna odpornost:** 120 ° C  
 (začasno do 135 ° C)  
**Lepilna trdnost:** 24 N / 25 mm  
**Debelina:** 0,05 mm

**Adhesive:** acrylic  
**Maximum temperature:** 120°C (up to 135° C for short periods)  
**Adhesive strength:** 24 N/25 mm  
**Thickness:** 0,05 mm



### ZIP FIX

- Samolepilni, zelo močan Velcro trak
- Primerno za lahke in težke obremenitve, kot npr. Avto preproge, avtomobilске naprave, avdio naprave itd.
- Dober oprijem na kovino, steklo, les, keramiko in plastiko
- Primerno tudi za zunanjo uporabo
- Very strong self-adhesive hook and loop tape
- Suitable for both light and heavy loads, for example: car mats, car tools, audio equipment, etc.
- Good adhesion to metal, glass, wood, ceramics and plastics
- Also suitable for outdoor use

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
Z2005H	20 mm	5 m	schwarz/black	10	5425014220377
Z2005L	20 mm	5 m	schwarz/black	10	5425014220957
Z2025H	20 mm	25 m	schwarz/black	12	5425014224078
Z2025L	20 mm	25 m	schwarz/black	12	5425014224092

**Lepilo:** sintetična guma  
**Nosilni material:** Poliamidi  
**Temperaturna odpornost:** 100 ° C  
**Debelina:** 1,50 mm

**Adhesive:** synthetic rubber  
**Carrier:** polyamide  
**Maximum temperature:** 100°C  
**Thickness:** 1,50 mm

### DUO GRIP

- Uspešno pritrdjevanje s klikom: najboljšo pritrditev dobimo s pritiskom struktur kavljev do konca
- Primerno za lahke in težke obremenitve, na primer: preproge, avtomobilsko orodje, avdio oprema itd.
- Lahko prenese do petkrat večje obremenitve kot pri tradicionalnih povezavah "kavelj in zanka"
- Resecurable click-fastening action: the best attachment is obtained by pressing the hook structures fully together
- Suitable for both light and heavy loads, for example: car mats, car tools, audio equipment, etc.
- Can withstand loads up to five times greater than with traditional "hook and loop" connections



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
DG2502	25 mm	2 m	schwarz/black	10	5425014220759

**Lepilo:** sintetična guma  
**Nosilni material:** Poliamidi  
**Temperaturna odpornost:** 93 ° C  
**Debelina:** 5,40 mm

**Adhesive:** synthetic rubber  
**Carrier:** polyamide  
**Maximum temperature:** 93°C  
**Thickness:** 5,40 mm



### BACKGRIP

- Tridimenzionalni pritrdilni element iz folije iz PP
- Mikrostrukturalna površina se drži večine tkanin, tudi najboljših struktur
- Negorljive
- Brez poškodb občutljivih kablov
- Brez zatikanja kablov
- Hitro in enostavno nanašanje
- 3-dimensional film fastener in PP
- The micro-structured surface makes a strong connection to the woven surface
- Flame retardant
- Does not damage fragile cables
- Does not pinch cables
- Quick and easy to install

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
BG1605	16 mm	5 m	schwarz/black	24	5407004561615

**Nosilni material:** Polipropilen  
**Temperaturna odpornost:** 100 ° C  
**Debelina:** 0,90 mm

**Carrier:** polypropylene  
**Maximum temperature:** 100°C  
**Thickness:** 0,90 mm




**BUTYL SEALING TAPE**

- Tesnilni trak pred vodo, prahom in prepihom za avtomobile in bivalne prikolice (blatniki, okrasni in vratni trakovi), hiše (tesnjenje strešnih oken, podstavkov, žlebov in okenskih okvirjev) in čolnov (tesnjenje med kovino, lesom in plastiko)
- Trajnostno, elastično in odporno proti obrabi
- Možnost strojnega vrtanja
- Primerna tudi za modeliranje gline za luknje, Vogali in sklepi

- Sealing tape against water, dust and draughts for cars and caravans (mudguards, ornamental and door frames), houses (sealing skylights, baseboards, gutters and window frames) and boats (seals between metal, wood and plastics)
- Sustainable, elastic and wear resistant
- Can be drilled by machine
- Also suitable as a soft material for holes, corners and joints

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
BU2003	20 mm	3 m	grau/grey	12	5425014223378

**Lepilo:** Butilna guma  
**Nosilni material:** Butil  
**Temperaturna odpornost:** 90 ° C  
**Lepilna trdnost:** 20 N / 25 mm  
**Debelina:** 2,00 mm

**Adhesive:** butyl rubber  
**Carrier:** butyl  
**Maximum temperature:** 90°C  
**Adhesive strength:** 20 N/25 mm  
**Thickness:** 2,00 mm

**POWER SEALING TAPE**

- Tesnilni trak z zelo visoko lepilno trdnostjo
- Primerno za večkratno uporabo in popravila
- Odlične tesnilne lastnosti in močna prilagodljivost
- Notranja in zunanja uporaba
- Vodoodporen in vremensko odporen

- Adhesive sealing tape with high adhesive strength
- Suitable for multiple applications and repairs
- Excellent sealing properties and strong adaptability
- Indoor and outdoor use
- Waterproof and weather resistant



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
PS3802	38 mm	1,5 m	semi-transp./semi-transp.	20	5425014227277

**Lepilo:** akril  
**Nosilni material:** Akrilna pena  
**Temperaturna odpornost:** 93 ° C  
 (začasno do 150 ° C)  
**Lepilna trdnost:** 100 N / 25 mm  
**Debelina:** 1,00 mm

**Adhesive:** acrylic  
**Carrier:** acrylic foam  
**Maximum temperature:** 93°C (up to 150°C for short periods)  
**Adhesive strength:** 100 N/25 mm  
**Thickness:** 1,00 mm

### ALUBUTYL

- Primerno za tesnjenje gradbenih spojev
- Konstrukcije naredite vodotesne
- Vodoodporen in zelo trajnosten
- Zelo odporen
- Prepustnost vodne pare: 0,5 g / m<sup>2</sup> -24 ur


- For use in waterproofing construction joints
- For waterproofing of buildings
- Excellent durability and water resistance
- Excellent anti-aging resistance
- Water vapor permeability: 0,5 g/m<sup>2</sup> - 24h



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
AY5020	50 mm	20 m	alu-schwarz/alu-black	18	5407004561240

**Lepilo:** Butilna guma  
**Nosilni material:** Butil + aluminij  
**Natezna trdnost:** 118 N / 25 mm  
**Lepilna trdnost:** 20 N / 25 mm  
**Debelina:** 0,50 mm

**Adhesive:** butyl rubber  
**Carrier:** butyl + aluminium  
**Tensile strength:** 118 N/25 mm  
**Adhesive strength:** 20 N/25 mm  
**Thickness:** 0,50 mm

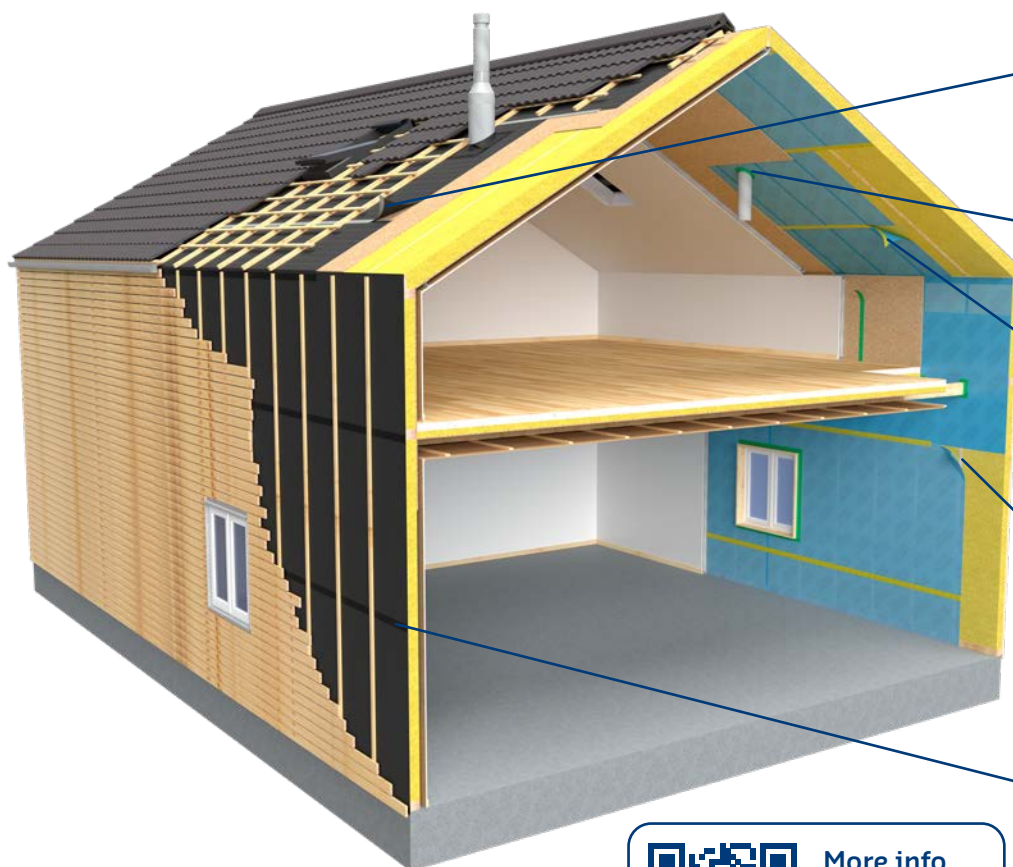

More info  
about the  
system?  
Scan the  
QR-code!

### AIRTIGHT FLEX

- Prilagodljiv, enostranski polietilenski trak za notranjo uporabo
- Nepredušno tesnjenje prebojev (npr. Kablov, cevi, ...) in drugih priključnih mest
- Primerno za lepljenje in pokrivanje prekrivanj parnih zapor
- Tesnjenje spojev v OSB in DWD ploščah
- Dober oprijem na nepolarne in LSE površine
- Delovna temperatura: do -10 ° C (idealno med 5 ° C in 35 ° C)
- DIN 4108/7 in DIN 4108/11
- Emicode EC1 plus

- Flexible, single sided, polyethylene tape for indoor use
- Airtight sealing of penetrations (e.g. cables, pipes, ...) and other connections
- Can be used for bonding and covering overlaps
- Sealing of joints of OSB and DWD panels
- Good adhesion to non-polar and low energy surfaces (LSE)
- Service temperature: until -10°C (ideally between 5°C and 35°C)
- DIN 4108/7 and DIN 4108/11
- Emicode EC1 plus



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
IS5025	50 mm	25 m	grün/green	30	5407004560076
IS6025	60 mm	25 m	grün/green	24	5425014228465

**Lepilo:** plast akril  
**Nosilni material:** Polietilen z ojačano mrežico  
**Temperaturna odpornost:** -30 ° C - + 100 ° C  
**Lepilna trdnost:** 25 N / 25 mm  
**Debelina:** 0,25 mm

**Adhesive:** acrylic  
**Carrier:** polyethylene with reinforced scrim  
**Maximum temperature:** -30°C - +100°C  
**Adhesive strength:** 25 N/25 mm  
**Thickness:** 0,25 mm

### AIRTIGHT UV

- Prilagodljiv polietilenski trak, odporen proti UV-žarkom, za zunanjo uporabo
- Nevidno tesnjenje in spajanje prekrivanj za vremensko odporno laminiranje fasadnih folij
- Za (pol) odprte fasade
- Popolnoma nepremočljiva
- Dober oprijem na nepolarne in LSE površine
- Delovna temperatura: do -10 ° C (idealno med 5 ° C in 35 ° C)
- DIN 4108/7 in DIN 4108/11
- Flexible, UV resistant polyethylene tape for outdoor use
- Invisible sealing and bonding of overlaps for a weatherproof lamination of outside facade films
- For (semi-) open facades
- Impeachable to water
- Good adhesion to non-polar and low energy surfaces (LSE)
- Service temperature: until -10°C (ideally between 5°C and 35°C)
- DIN 4108/7 and DIN 4108/11




Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
US6025	60 mm	25 m	schwarz/black	24	5407004563299
US9025	90 mm	25 m	schwarz/black	12	5407004563312

**Lepilo:** akril  
**Nosilni material:** Polietilen z ojačano mrežico  
**Temperaturna odpornost:** -30 ° C - + 100 ° C  
**Lepilna trdnost:** 25 N / 25 mm  
**Debelina:** 0,27 mm

**Adhesive:** acrylic  
**Carrier:** polyethylene with reinforced scrim  
**Maximum temperature:** -30°C - +100°C  
**Adhesive strength:** 25 N/25 mm  
**Thickness:** 0,27 mm

### AIRTIGHT INDOOR

- Papirni tesnilni trak za prečno lepljenje membran in parnih zapor
- Notranja uporaba
- Tesnjenje priključnih mest na OSB ploščah
- Dober oprijem na nepolarne in LSE površine
- Lahko se strga ročno
- Delovna temperatura: do -10 ° C (idealno med 5 ° C in 35 ° C)
- DIN 4108/7 in DIN 4108/11
- Emicode EC1 plus
- Paper sealing tape for transverse bonding of membranes and vapour barriers
- Indoor use
- Sealing of butt joints of OSB-boards
- Good adhesion to non-polar and low energy surfaces (LSE)
- Hand tearable
- Service temperature: until -10°C (ideally between 5°C and 35°C)
- DIN 4108/7 and DIN 4108/11
- Emicode EC1 plus

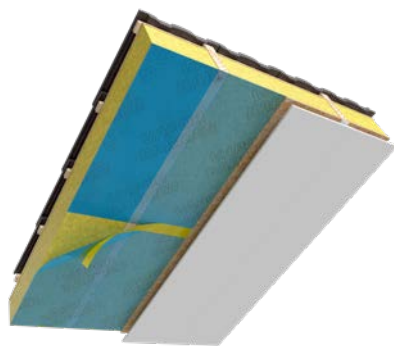

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
AI6025	60 mm	25 m	gelb/yellow	24	5407004563961

**Lepilo:** akril  
**Nosilni material:** Papir, prevlečen s PE  
**Temperaturna odpornost:** -30 ° C - + 100 ° C  
**Lepilna trdnost:** 25 N / 25 mm  
**Debelina:** 0,27 mm

**Adhesive:** acrylic  
**Carrier:** PE coated paper  
**Maximum temperature:** -30°C - +100°C  
**Adhesive strength:** 25 N/25 mm  
**Thickness:** 0,27 mm



### AIRTIGHT ROOF

- Tesnilni in lepilni trak za vetrno in deževno tesnjenje podstrešnih oblog na poševnih strehah
- Polipropilenski trak za zaščito pred vlago štiti pred vlago in plesnijo ter tako podaljša življenjsko dobo gradbenih materialov
- Dobra odpornost proti toplotnemu raztezanju in gibanju ovoja stavbe
- Lahko je tlakovana
- Dober oprijem na nepolarne in LSE površine ter HDPE / PP / PE flis
- Delovna temperatura: do -10 ° C (idealno med 5 ° C in 35 ° C)
- DIN 4108/7 in DIN 4108/11
- Emicode EC1 plus

- Sealing and bonding tape for wind- and rainproofing the underlays of steep roofs
- Polypropylene spunbond tape protects against exposure to moisture and vapor, increasing the life expectancy of construction materials
- Copes well with thermal expansion and building movement
- Can be plastered over
- Good adhesion to non-polar and low energy surfaces (LSE), and HDPE/PP/PE fleeces
- Service temperature: until -10°C (ideally between 5°C and 35°C)
- DIN 4108/7 and DIN 4108/11
- Emicode EC1 plus



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
AR6025	60 mm	25 m	grau/grey	24	5407004563985


**Lepilo:** plast akril  
**Nosilni material:** Polipropilenski spunbond  
**Temperaturna odpornost:** -30 ° C - + 100 ° C  
**Lepilna trdnost:** 30 N / 25 mm  
**Debelina:** 0,55 mm

**Adhesive:** acrylic  
**Carrier:** polypropylene spunbond  
**Maximum temperature:** -30°C - +100°C  
**Adhesive strength:** 30 N/25 mm  
**Thickness:** 0,55 mm

### AIRTIGHT FIX

- Dvostranski trak z ojačano tkanino
- za polaganje parnih zapor Kovinske in lesene konstrukcije
- Zelo visoka lepilna trdnost

- Double sided tape with reinforced scrim
- To mount vapor barriers on metal and wooden structures
- Very high adhesive strength

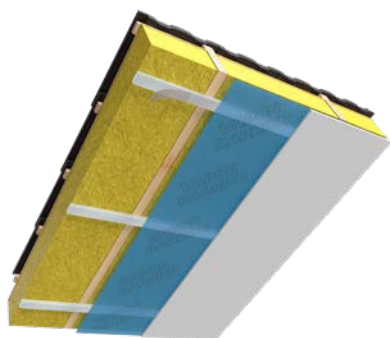

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
AF3850	38 mm	50 m	transparent/transparent	24	5407004564005

**Lepilo:** akril  
**Nosilni material:** Tkanina iz poliestra  
**Temperaturna odpornost:** 120 ° C  
**Lepilna trdnost:** 30 N / 25 mm  
**Debelina:** 0,22 mm

**Adhesive:** acrylic  
**Carrier:** polyester scrim  
**Maximum temperature:** 120°C  
**Adhesive strength:** 30 N/25 mm  
**Thickness:** 0,22 mm


**MASKING TAPE 110°C**

- Visokokakovostni lepilni trak v avtomobilski kakovosti
- Primerno za pokrivanje različnih predmetov
- Dober oprijem na kovino, steklo, plastiko in gumo
- Pri uporabi do 110 ° C ne pušča ostankov lepila
- Odporen na topila
- Ni odporen na UV žarke (za zunanjo uporabo v 8 urah po nanosu Odstrani)
- High quality masking tape in automotive quality
- Suitable for masking all types of objects
- Good adhesion to metal, glass, plastics and rubber
- Does not leave any adhesive residues at temperatures up to 110°C
- Solvent resistant
- Not UV-resistant (when used outside, remove within 8 hours after application)

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
MT1950	19 mm	50 m	cremeweiß/cream	48	n/a
MT2550	25 mm	50 m	cremeweiß/cream	36	n/a
MT3850	38 mm	50 m	cremeweiß/cream	24	n/a
MT5050	50 mm	50 m	cremeweiß/cream	24	n/a

**Lepilo:** Naravna guma  
**Nosilni material:** Krep papir  
**Temperaturna odpornost:** 100 ° C  
 (začasno do 110 ° C)  
**Natezna trdnost:** 87,5 N / 25 mm  
**Lepilna trdnost:** 5,5 N / 25 mm  
**Debelina:** 0,13 mm

**Adhesive:** natural rubber  
**Carrier:** crepe paper  
**Maximum temperature:** 100°C (up to 110° C for short periods)  
**Tensile strength:** 87,5 N/25 mm  
**Adhesive strength:** 5,5 N/25 mm  
**Thickness:** 0,13 mm

**MASKING TAPE 60°C**


- lepilni trak v slikarski kakovosti
- Primerno za avtomobile, gospodinjstva in industrijo
- Dober oprijem na kovino, steklo, plastiko in gumo
- Pri uporabi do 60 ° C ne pušča ostankov lepila
- Odporen na topila
- Ni odporen na UV žarke (za zunanjo uporabo v 8 urah po nanosu Odstrani)
- Masking tape, in painting quality
- Suitable for automotive, DIY and industrial use
- Good adhesion to metal, glass, plastics and rubber
- Does not leave any adhesive residues when used up to 60°C
- Solvent resistant
- Not UV-resistant (when used outside, remove within 8 hours after application)

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
MA1950	19 mm	50 m	cremeweiß/cream	48	8711347173259
MA2550	25 mm	50 m	cremeweiß/cream	36	8711347178773
MA3050	30 mm	50 m	cremeweiß/cream	40	5425014227871
MA3850	38 mm	50 m	cremeweiß/cream	24	8711347179060
MA5050	50 mm	50 m	cremeweiß/cream	24	8711347173273

**Lepilo:** Naravna guma  
**Nosilni material:** Krep papir  
**Temperaturna odpornost:** 60 ° C  
 (začasno do 80 ° C)  
**Natezna trdnost:** 87,5 N / 25 mm  
**Lepilna trdnost:** 5 N / 25 mm  
**Debelina:** 0,13 mm

**Adhesive:** natural rubber  
**Carrier:** crepe paper  
**Maximum temperature:** 60°C (up to 80°C for short periods)  
**Tensile strength:** 87,5 N/25 mm  
**Adhesive strength:** 5 N/25 mm  
**Thickness:** 0,13 mm


**MASKING 4400 FINE LINE**

- Kakovosten lepilni trak "zlate barve" za izjemno ostre robove
- Dober oprijem na kovino, steklo, plastiko in gumo
- Odporen na topila
- UV-odporen, ga je mogoče odstraniti z večine površin, ne da bi v 4 mesecih pustil sledi
- Primeren tudi kot trak FineLine za Telesne aplikacije
- High quality "gold" masking tape, for extremely sharp edges
- Good adhesion to metal, glass, plastics and rubber
- Solvent resistant
- UV resistant, does not leave any residues on most substrates if removed within 4 months of application
- Also suitable as a fine line tape for automotive applications

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
FP2525	25 mm	25 m	orange/orange	45	5425014223231
FP0650	6 mm	50 m	orange/orange	24	n/a
FP1950	18 mm	50 m	orange/orange	48	5425014224719
FP2550	24 mm	50 m	orange/orange	36	5425014220858
FP3850	36 mm	50 m	orange/orange	24	5425014220841
FP5050	48 mm	50 m	orange/orange	16	5425014223484

**Lepilo:** akril  
**Nosilni material:** Japonski papir  
**Temperaturna odpornost:** 100 °C  
 (začasno do 150 °C)  
**Natezna trdnost:** 75 N / 25 mm  
**Lepilna trdnost:** 5 N / 25 mm  
**Debelina:** 0,09 mm

**Adhesive:** acrylic  
**Carrier:** wash paper  
**Maximum temperature:** 100°C (up to 150° C for short periods)  
**Tensile strength:** 75 N/25 mm  
**Adhesive strength:** 5 N/25 mm  
**Thickness:** 0,09 mm

**MASKING 4800 DELICATE SURFACES**


- Lepilni trak za suhozidne stene, tapete in druge občutljive podlage
- Primerno za splošno uporabo in barvanje, kjer je potreben kvaliteten, kvaliteten, nizkolepilni trak
- Masking tape for dry walls, wallpaper and other delicate substrates
- Suitable for paint and general applications where low adhesion with high quality tape is required

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
SR2525	25 mm	25 m	violett/purple	45	5425014223309
PW2550	24 mm	50 m	violett/purple	36	5425014229462
PW3850	36 mm	50 m	violett/purple	24	5425014229486
PW5050	48 mm	50 m	violett/purple	16	5425014229509

**Lepilo:** plast akril  
**Nosilni material:** Japonski papir  
**Temperaturna odpornost:** 60 °C  
**Natezna trdnost:** 102,5 N / 25 mm  
**Lepilna trdnost:** 2 N / 25 mm  
**Debelina:** 0,07 mm

**Adhesive:** acrylic  
**Carrier:** wash paper  
**Maximum temperature:** 60°C  
**Tensile strength:** 102,5 N/25 mm  
**Adhesive strength:** 2 N/25 mm  
**Thickness:** 0,07 mm



### MASKING 4900 EXTRA STRONG

- UV lepilni trak za nekoliko bolj hrapave površine
- Za notranjo in zunanjo uporabo
- Odlična lepilna trdnost
- Primerno tudi za visoke temperature (do + 120 ° C / 1h)
- Dober oprijem na vse vrste površin
- Lahko ga odstranite brez ostankov v roku 6 Meseci
- UV masking tape for slightly rough surfaces
- For both indoor and outdoor use
- Excellent holding power
- High temperature applications (up to +120°C/1h)
- Good adhesion on all kind of substrate
- Can be used for clean and residue free removal up to 6 months

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
EW2550	24 mm	50 m	hellblau/light blue	36	5407004561479
EW3850	36 mm	50 m	hellblau/light blue	24	5407004561493
EW5050	48 mm	50 m	hellblau/light blue	16	5407004561516

**Lepilo:** akril  
**Nosilni material:** Japonski papir  
**Temperaturna odpornost:** 120 ° C  
**Natezna trdnost:** 117 N / 25 mm  
**Lepilna trdnost:** 6 N / 25 mm  
**Debelina:** 0,11 mm

**Adhesive:** acrylic  
**Carrier:** washi paper  
**Maximum temperature:** 120°C  
**Tensile strength:** 117 N/25 mm  
**Adhesive strength:** 6 N/25 mm  
**Thickness:** 0,11 mm

### MASKING TAPE UV



- Za notranjo in zunanjo uporabo
- Preprosto odstranljiv brez ostankov v 14 dneh
- Dobro lepilno trdnost in odpornost na UV žarke
- For outdoor and indoor applications
- Easy removable without leaving residue up to 14 days after application
- Good adhesion and UV resistant

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
MU1950	19 mm	50 m	blau/blue	48	5425014224894
MU2550	25 mm	50 m	blau/blue	36	5425014224917
MU3850	38 mm	50 m	blau/blue	24	5425014224931

**Lepilo:** Akril na vodni osnovi  
**Nosilni material:** Nasičen papir  
**Temperaturna odpornost:** 60 ° C  
**Natezna trdnost:** 96 N / 25 mm  
**Lepilna trdnost:** 4,9 N / 25 mm  
**Debelina:** 0,15 mm

**Adhesive:** water-based acrylic  
**Carrier:** saturated paper  
**Maximum temperature:** 60°C  
**Tensile strength:** 96 N/25 mm  
**Adhesive strength:** 4,9 N/25 mm  
**Thickness:** 0,15 mm





### EASY MASK

- Prozoren film z lepilnim trakom za notranjo uporabo
- Samodejni oprijem filma na podlago zaradi statičnega naboja
- Pokrivanje in maskiranje velikih površin (npr. Pohištvo, stene)
- Primerno za gladke in rahlo hrapave površine

- Transparent foil with masking tape for indoor usage
- The foil clings to surfaces due to its electrostatic properties
- For covering and masking large surfaces (e.g. furniture, walls)
- Suitable for smooth and slightly rough surfaces

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
PM5533	550 mm	33 m	/	60	5425014225365
PM11033	1100 mm	33 m	/	30	5425014225389
PM270016	2700 mm	16 m	/	18	5425014225662

**Lepilo:** Naravna guma  
**Nosilni material:** Krep papir  
**Temperaturna odpornost:** 60 ° C  
 (začasno do 80 ° C)  
**Natezna trdnost:** 87,5 N / 25 mm  
**Lepilna trdnost:** 5 N / 25 mm  
**Debelina:** 0,13 mm

**Adhesive:** natural rubber  
**Carrier:** crepe paper  
**Maximum temperature:** 60°C (up to 80°C for short periods)  
**Tensile strength:** 87,5 N/25 mm  
**Adhesive strength:** 5 N/25 mm  
**Thickness:** 0,13 mm

### EASY MASK + DISPENSER



- Easy Mask Film v priročnem razpršilniku
- Prozoren film z lepilnim trakom za notranjo uporabo
- Pokrivanje in maskiranje velikih Površin (npr. Pohištvo, stene)

- Easy Mask Film packed in a handy dispenser
- Transparent foil with masking tape for indoor usage
- For covering and masking large surfaces (e.g. furniture, walls)

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
DE5533	550 mm	33 m	/	50	5425014227116
DE11033	1100 mm	33 m	/	25	5425014227178
DE270016	2700 mm	16 m	/	25	5425014227130

**Lepilo:** Naravna guma  
**Nosilni material:** Krep papir  
**Temperaturna odpornost:** 60 ° C  
 (začasno do 80 ° C)  
**Natezna trdnost:** 87,5 N / 25 mm  
**Lepilna trdnost:** 5 N / 25 mm  
**Debelina:** 0,13 mm

**Adhesive:** natural rubber  
**Carrier:** crepe paper  
**Maximum temperature:** 60°C (up to 80°C for short periods)  
**Tensile strength:** 87,5 N/25 mm  
**Adhesive strength:** 5 N/25 mm  
**Thickness:** 0,13 mm



### EASY MASK FINE LINE

Enostavna maska FINE LINE

- Prozoren film z lepilnim trakom za notranjo uporabo
- Samodejni oprijem filma na podlago zaradi statičnega naboja
- Pokrivanje in maskiranje velikih površin (npr. Pohištvo, stene)
- Primerno za gladke in rahlo hrapave površine
- Kakovosten lepilni trak "zlate barve" za izjemno ostre robove
- UV-odporen, ga lahko odstranite z večine površin, ne da bi pri tem ostali ostanki v 4 meseci

- Transparent foil with masking tape for indoor usage
- The foil clings to surfaces due to its electrostatic properties
- For covering and masking large surfaces (e.g. furniture, walls)
- Suitable for smooth and slightly rough surfaces
- High quality "gold" masking tape, for extremely sharp edges
- UV resistant, does not leave any residues on most substrates if removed within 4 months after application

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
EM5533	550 mm	33 m	/	60	5425014229523
EM11033	1100 mm	33 m	/	30	5425014229547
EM27020	2700 mm	20 m	/	30	5425014229561

**Lepilo:** akril

**Nosilni material:** Japonski papir

**Temperaturna odpornost:** 100 °C

(začasno do 150 °C)

**Natezna trdnost:** 75 N / 25 mm

**Lepilna trdnost:** 5 N / 25 mm

**Debelina:** 0,09 mm

**Adhesive:** acrylic

**Carrier:** washi paper

**Maximum temperature:** 100°C (up to 150°

C for short periods)

**Tensile strength:** 75 N/25 mm

**Adhesive strength:** 5 N/25 mm

**Thickness:** 0,09 mm

### EASY MASK OUTDOOR

- Prozorna HDPE folija s trakom iz blaga za notranjo in zunanjo uporabo
- Samodejni oprijem filma na podlago zaradi statičnega naboja
- Pokrivanje in maskiranje velikih površin (npr. Okna in vrata)
- Primerno za grobe površine

- Transparent HDPE foil with cloth tape for in- and outdoor usage
- The foil clings to surfaces due to its electrostatic properties
- For covering and masking of large surfaces (e.g. windows and doors)
- Suitable for rough surfaces



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
PC5520	550 mm	20 m	/	30	5425014225426
PC1120	1100 mm	20 m	/	30	5407004562810
PC2117	2100 mm	17 m	/	30	5407004562834
PC2617	2600 mm	17 m	/	30	5407004562858

**Lepilo:** Naravna guma

**Nosilni material:** Tkanina, prevlečena s PE

**Temperaturna odpornost:** 60 °C

**Natezna trdnost:** 147 N / 25 mm

**Lepilna trdnost:** 7 N / 25 mm

**Debelina:** 0,30 mm

**Adhesive:** natural rubber

**Carrier:** PE coated cloth

**Maximum temperature:** 60°C

**Tensile strength:** 147 N/25 mm

**Adhesive strength:** 7 N/25 mm

**Thickness:** 0,30 mm



### PRO COVER

- Samolepilna zaščitna folija, odporna na UV žarke
- Za zaščito in pokrivanje stekla, Okna, vrata itd.

- Self-adhesive UV-resistant protective film
- For protecting and covering glass, windows, doors, etc.

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
GF2510	25 cm	100 m	grün/green	12	5407004562728
GF5010	50 cm	100 m	grün/green	6	5407004562742
GF1001	100 cm	100 m	grün/green	6	5407004562766

**Lepilo:** akril  
**Nosilni material:** PE  
**Debelina:** 55 µm

**Adhesive:** acrylic  
**Carrier:** PE  
**Thickness:** 55 µm

### PVC ORANGE

- Zaščitni trak z močno lepilno trdnostjo
- Primerno za gradbena in ometna dela
- Odporen na razpoke
- Prilagodljiva, močna lepilna sila, enostavna za odvijanje
- Kratkoročno ne ostane ostankov lepila
- Uporaba na prostem

- Protective tape with high adhesive strength
- Suitable for construction and plaster works
- Resistant to tearing
- Flexible, strong adhesion, easy unwinding
- Leaves no residue after short term outdoor use



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
PT5033	50 mm	33 m	orange/orange	36	5425014220315
PT7533	75 mm	33 m	orange/orange	24	5425014223811

**Lepilo:** guma  
**Nosilni material:** PVC  
**Temperaturna odpornost:** 60 ° C  
**Natezna trdnost:** 29 N / 25 mm  
**Lepilna trdnost:** 4 N / 25 mm  
**Debelina:** 0,13 mm

**Adhesive:** rubber  
**Carrier:** PVC  
**Maximum temperature:** 60°C  
**Tensile strength:** 29 N/25 mm  
**Adhesive strength:** 4 N/25 mm  
**Thickness:** 0,13 mm

### CLEAN REMOVAL TAPE

- Za pritrditev slikarskega pokrivnega flisa
- Zaščitni trak za plastiko, okenske okvire, podstavke, stopnice itd.
- Lahko ga odstranite brez ostankov v 6 tednih po nanosu (ne na steklu)
- Lahko se strga ročno
- Ponuja dobro zaščito

- Fixation of floor protection
- Protection tape for plastics, frames, plinths, stairways, etc.
- Leaves no residue if removed within 6 weeks after application (not on glass)
- Hand tearable
- Provides good protection



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
CR5033	50 mm	33 m	weiß/white	36	5425014225242

**Lepilo:** plast guma  
**Nosilni material:** PVC  
**Temperaturna odpornost:** 60 ° C  
**Natezna trdnost:** 39 N / 25 mm  
**Lepilna trdnost:** 2 N / 25 mm  
**Debelina:** 0,12 mm

**Adhesive:** rubber  
**Carrier:** PVC  
**Maximum temperature:** 60°C  
**Tensile strength:** 39 N/25 mm  
**Adhesive strength:** 2 N/25 mm  
**Thickness:** 0,12 mm

**PVC FORM WORK TAPE**

- Betonski opažni trak
- Dober oprijem na umazanih in vlažnih površinah zaradi debeline lepilne plasti
- Prilagodljiv
- Formwork tape
- Good adhesion to polluted and humid surfaces thanks to the thick adhesive layer
- Flexible



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
BT5033	50 mm	33 m	gelb/yellow	36	5425014224818

**Lepilo:** guma  
**Nosilni material:** PVC  
**Temperaturna odpornost:** 60 ° C  
**Natezna trdnost:** 65 N / 25 mm  
**Lepilna trdnost:** 9 N / 25 mm  
**Debelina:** 0,14 mm

**Adhesive:** rubber  
**Carrier:** PVC  
**Maximum temperature:** 60°C  
**Tensile strength:** 65 N/25 mm  
**Adhesive strength:** 9 N/25 mm  
**Thickness:** 0,14 mm

**TRIM MASKING TAPE**

- Lepilni trak za gumijaste dele okoli avtomobilskih stekel
- Primerno za skoraj vse vrste vozil
- Perforirana, enostavna za trganje
- Visoka lepilna trdnost
- Blazinica = 9 + 11 mm
- Trim masking tape for rubber parts around car windows
- Suitable for practically all types of cars
- Perforated, easily tearable
- High adhesive strength
- Pad = 9 + 11 mm



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
TM1010	45 mm	10 m	hellblau/light blue	36	5425014220773

**Lepilo:** akril  
**Nosilni material:** Japonski papir  
**Temperaturna odpornost:** 120 ° C  
**Natezna trdnost:** 117 N / 25 mm  
**Lepilna trdnost:** 6 N / 25 mm  
**Debelina:** 0,11 mm

**Adhesive:** acrylic  
**Carrier:** wash paper  
**Maximum temperature:** 120°C  
**Tensile strength:** 117 N/25 mm  
**Adhesive strength:** 6 N/25 mm  
**Thickness:** 0,11 mm

**FINE LINE TAPE**

- Zelo tanek, modri vinilni trak za natančno nanašanje, pa tudi lepljenje preko ostrih robov, slepih kovic in šivi telesa
- Primerno tudi za pokrivanje Zaščitni trakovi iz gume
- Lahko ga odstranite, ne da bi pri tem ostali ostanki
- Very thin, blue vinyl tape for critical applications, such as masking sharp edges, rivets and welds
- Also suitable for masking protective rubber strips
- Does not leave any residues



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
FL0333	3 mm	33 m	blau/blue	40	8711347114658
FL0633	6 mm	33 m	blau/blue	36	8711347114672
FL0933	9 mm	33 m	blau/blue	40	5425014225808
FL1233	12 mm	33 m	blau/blue	20	8711347114696

**Lepilo:** Naravna guma  
**Nosilni material:** PVC  
**Temperaturna odpornost:** 150 ° C  
**Lepilna trdnost:** 7 N / 25 mm  
**Debelina:** 0,15 mm

**Adhesive:** natural rubber  
**Carrier:** PVC  
**Maximum temperature:** 150°C  
**Adhesive strength:** 7 N/25 mm  
**Thickness:** 0,15 mm



### SAFETY TAPE

- Samolepilni varnostni trak
- Primerno za (talne) oznake
- Z dodatnim premazom za trajne rezultate

- Self-adhesive safety tape
- Suitabel for (floor) markings
- With extra coating for durable result



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
HW5033	50 mm	33 m	gelb-schwarz/yellow-black	36	5425014220308
RW5033	50 mm	33 m	rot-weiß/red-white	36	5425014221695

**Lepilo:** guma  
**Nosilni material:** PVC  
**Temperaturna odpornost:** 80 ° C  
**Natezna trdnost:** 82 N / 25 mm  
**Lepilna trdnost:** 3 N / 25 mm  
**Debelina:** 0,19 mm

**Adhesive:** rubber  
**Carrier:** PVC  
**Maximum temperature:** 80°C  
**Tensile strength:** 82 N/25 mm  
**Adhesive strength:** 3 N/25 mm  
**Thickness:** 0,19 mm

### SAFETY TEXTILE TAPE

- Kakovosten varnostni trak iz blaga
- Primerno za označevanje, povezovanje in začasno popravilo
- Lahko se strga ročno
- Vodoodporen in vremensko odporen

- High quality safety cloth tape
- Suitable for marking, bundling and temporary repairs
- Hand tearable
- Waterproof and weather resistant



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
RS4825	48 mm	25 m	rot-weiß/red-white	30	5425014229301
YS4825	48 mm	25 m	gelb-schwarz/yellow-black	30	5425014229325

**Lepilo:** Naravna guma  
**Nosilni material:** Tkanina, prevlečena s PE  
**Temperaturna odpornost:** 80 ° C  
**Natezna trdnost:** 161 N / 25 mm  
**Lepilna trdnost:** 10 N / 25 mm  
**Debelina:** 0,30 mm

**Adhesive:** natural rubber  
**Carrier:** PE coated cloth  
**Maximum temperature:** 80°C  
**Tensile strength:** 161 N/25 mm  
**Adhesive strength:** 10 N/25 mm  
**Thickness:** 0,30 mm

### HEAVY DUTY MARKING TAPE

- Traja do trikrat dlje
- Trajnostno
- Odporna
- Lepi se na skoraj vseh površinah
- Odporen na (peš) promet, vključno z viličarji
- Takoj dostopen po namestitvi

- Lasts up to three times longer
- Durable
- Wear resistant
- Adheres to almost any surface
- Resistant to walking and traffic, including fork lift traffic
- Walkable immediately after application



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
TB5033	48 mm	33m	gelb-schwarz/yellow-black	24	5425014229721
TY5033	48 mm	33m	gelb/yellow	24	5425014229707

**Lepilo:** guma  
**Nosilni material:** PVC  
**Temperaturna odpornost:** 80 ° C  
**Natezna trdnost:** 59 N / 25 mm  
**Lepilna trdnost:** 4 N / 25 mm  
**Debelina:** 0,19 mm

**Adhesive:** rubber  
**Carrier:** PVC  
**Maximum temperature:** 80°C  
**Tensile strength:** 59 N/25mm  
**Adhesive strength:** 4 N/25mm  
**Thickness:** 0,19 mm

### LANE MARKING TAPE

- Barvni označevalni trak, za označevanje tal, cevi itd.
- Coloured marking tape, for marking floors, pipes, etc.



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
LB5033	48 mm	33 m	blau/blue	36	5425014220285
LG5033	48 mm	33 m	grün/green	36	5407004560571
LR5033	48 mm	33 m	rot/red	36	5425014220261
LW5033	48 mm	33 m	weiß/white	36	5425014220292
LY5033	48 mm	33 m	gelb/yellow	36	5425014220278

**Lepilo:** guma  
**Nosilni material:** PVC  
**Temperaturna odpornost:** 80 ° C  
**Natezna trdnost:** 59 N / 25 mm  
**Lepilna trdnost:** 4,4 N / 25 mm  
**Debelina:** 0,15 mm

**Adhesive:** rubber  
**Carrier:** PVC  
**Maximum temperature:** 80°C  
**Tensile strength:** 59 N/25 mm  
**Adhesive strength:** 4,4 N/25 mm  
**Thickness:** 0,15 mm

### BARRIER TAPE

- Belo / rdeči pregradni trak
- Dobra vidljivost
- Črnilo, odporno na UV in praske
- White/red barrier tape
- Good visibility
- UV and scratch resistant ink



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
B50100	50 mm	100 m	rot-weiß/red-white	36	5425014223835
B70100	70 mm	500 m	rot-weiß/red-white	12	5425014222869

**Nosilni material:** Polietilen  
**Debelina:** 0,03 mm

**Carrier:** polyethylene  
**Thickness:** 0,03 mm

### SUPER BARRIER TAPE

- Zelo močan, visokokakovosten pregradni trak iz okolju prijaznega posebnega polietilena
- Izredno odporen na trganje
- Odporen na številne vplive, vključno z UV žarki, toploto, mrazom in vlago
- Pakirano v enostavni škatli z razdelilnikom
- Beli / rdeči bloki na obeh straneh
- Very strong, high-quality barrier tape made from eco-friendly special polyethylene
- Extremely tear resistant
- Resistant to numerous influences, including UV rays, heat, cold and humidity
- Packed in a easy to use dispenser box
- White/red blocks printed on both sides



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
BS80100	80 mm	500 m	rot-weiß/red-white	10	5407004561455

**Nosilni material:** Polietilen  
**Debelina:** 0,03 mm

**Carrier:** polyethylene  
**Thickness:** 0,03 mm

### SAFETY GRIP

- Protizdrsna zaščita na gladkih površinah
- Primerno tako za industrijsko uporabo kot za domačo uporabo
- Visok oprijem
- Odporen na olje in vodo
- Za notranjo in zunanjo uporabo
- Anti-slip protection on smooth surfaces
- Suitable for both industrial applications and home use
- High adhesion
- Resistant to oil and water
- For both indoor and outdoor use



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
SB2505	25 mm	5 m	schwarz/black	36	5425014224986
SB2518	25 mm	18 m	schwarz/black	12	5425014224177
SC2518	25 mm	18 m	semi-transp./semi-transp.	12	5425014225020
SY2518	25 mm	18 m	gelb-schwarz/yellow-black	12	5425014224191
SB5005	50 mm	5 m	schwarz/black	16	5407004561592
SB5018	50 mm	18 m	schwarz/black	12	5425014224214
SY5018	50 mm	18 m	gelb-schwarz/yellow-black	12	5425014225228

**Lepilo:** akril  
**Nosilni material:** PVC  
**Temperaturna odpornost:** 50 °C  
**Natezna trdnost:** 59 N / 25 mm  
**Lepilna trdnost:** 15 N / 25 mm  
**Debelina:** 0,90 mm

**Adhesive:** acrylic  
**Carrier:** PVC  
**Maximum temperature:** 50°C  
**Tensile strength:** 59 N/25 mm  
**Adhesive strength:** 15 N/25 mm  
**Thickness:** 0,90 mm

### AQUA GRIP

- Idealno za zaščito proti zdrsu
- Velja na robovih plavalnih bazenov, tušev, kopeli, čolnov, jacuzzija, prečk itd.
- Odporen na slano in klorovo vodo, potopitev v vodo, toploto, detergente
- Največja varnost
- UV-odporen
- Za notranjo in zunanjo uporabo
- 8 listov na kuvertu
- Ideal for anti-slip protection
- Applicable on swimming pool edges, showers, baths, boats, jacuzzis, rungs, etc.
- Resistant to salt- and chlorine water, submersion in water, heat, detergents
- Maximum security
- UV-resistant
- For both indoor and outdoor use
- 8 sheets per envelope



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
AG2024	20 mm	240 mm	transparent/transparent	15	5425014225006

**Lepilo:** akril  
**Nosilni material:** PVC  
**Temperaturna odpornost:** 50 °C  
**Natezna trdnost:** 147 N / 25 mm  
**Lepilna trdnost:** 12 N / 25 mm  
**Debelina:** 0,72 mm

**Adhesive:** acrylic  
**Carrier:** PVC  
**Maximum temperature:** 50°C  
**Tensile strength:** 147 N/25 mm  
**Adhesive strength:** 12 N/25 mm  
**Thickness:** 0,72 mm

### CAR PAINT PROTECTION FILM



- Prozorna zaščitna folija pred kamnitimi ostružki in praskami
- Primerno tudi za okna avtomobilov in avtobusov
- Ne rumeni, dolgotrajno odporen proti UV-žar-kom
- Odporen na visokotlačno čiščenje
- Odstranljiv brez poškodb
- Kakovost OEM
- Transparent protective film against chippings and scratches
- Also suitable for car and bus windows
- Does not yellow, prolonged resistance to UV
- Resistant to high pressure cleaning
- Removable without damage
- OEM quality

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
PP1002	100 mm	2 m	transparent/transparent	12	5425014223354
PP1502	150 mm	2 m	transparent/transparent	12	5425014223453

**Lepilo:** akril  
**Nosilni material:** Poliuretanski film  
**Temperaturna odpornost:** 85 ° C  
**Natezna trdnost:** 75 N / 25 mm  
**Lepilna trdnost:** 17 N / 25 mm  
**Debelina:** 0,19 mm

**Adhesive:** acrylic  
**Carrier:** polyurethane film  
**Maximum temperature:** 85°C  
**Tensile strength:** 75 N/25 mm  
**Adhesive strength:** 17 N/25 mm  
**Thickness:** 0,19 mm

### BLACK PROTECTION FILM



- Samolepilna zaščitna folija
- Namenjeno zaščiti in dekoraciji okenskih stebrov, odbijačev itd.
- Enostaven nanos, moker in suh
- Enostaven za rezanje v želeno obliko
- Dolgotrajna odpornost na uporabo na prostem
- Kakovost OEM
- Self-adhesive protective film
- Intended for protecting and decorating window uprights, bumpers, etc.
- Easy to apply, both wet and dry
- Can be easily cut to the desired shape
- Prolonged stability in outdoor use
- OEM quality

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
BP1505	150 mm	5 m	schwarz/black	12	5425014223798

**Lepilo:** akril  
**Nosilni material:** vinil  
**Temperaturna odpornost:** 140 ° C  
**Lepilna trdnost:** 15 N / 25 mm  
**Debelina:** 0,15 mm

**Adhesive:** acrylic  
**Carrier:** vinyl  
**Maximum temperature:** 140°C  
**Adhesive strength:** 15 N/25 mm  
**Thickness:** 0,15 mm



### ALU TAPE

- Alumijski trak za popravilo in vezavo kovin
- Primerno za začasno ali trajno lepljenje v ekstremnih okoliščinah
- Lahko se uporablja tudi pri nizkih temperaturah
- Odlična vzdržljivost
- Aluminium tape for repairing and binding of metal
- Suitable for temporary or permanent bonding under extreme circumstances
- Can also be used at low temperature
- Excellent durability



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
AL5010	50 mm	10 m	aluminium/aluminium	54	5407004560113
AL5050	50 mm	50 m	aluminium/aluminium	24	5425014223026
AL7550	75 mm	50 m	aluminium/aluminium	16	5425014224238

**Lepilo:** topilo akril  
**Nosilni material:** aluminij  
**Temperaturna odpornost:** 120 ° C  
**Natezna trdnost:** 55 N / 25 mm  
**Lepilna trdnost:** 20 N / 25 mm  
**Debelina:** 0,08 mm

**Adhesive:** solvent acrylic  
**Carrier:** aluminium  
**Maximum temperature:** 120°C  
**Tensile strength:** 55 N/25 mm  
**Adhesive strength:** 20 N/25 mm  
**Thickness:** 0,08 mm

### DRYWALL JOINTING TAPE

- Močan, fleksibilen samolepilni mrežasti trak iz steklenih vlaken za prekrivanje fug iz suhih zidov pred teksturiranjem in dodelavo
- Tanek, a zelo močan
- Preprečuje razpoke
- Deluje hitro in preprosto
- Popoln rezultat
- Strong, flexible self-adhesive fiberglass mesh tape for covering drywall joints prior to texturing and finishing
- Thin but very strong
- Prevents cracks
- Works quick and simple
- Perfect result



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
FT4845	48 mm	45 m	weiß/white	54	5407004560137
FT5090	50 mm	90 m	weiß/white	24	5407004560151
FT10090	100 mm	90 m	weiß/white	12	5407004560175

**Nosilni material:** steklena vlakna  
**Natezna trdnost:** osnova 260 N / 2,54 cm - votek 550 N / 2,54 cm  
**Debelina:** 0,26 mm

**Carrier:** fiberglass  
**Tensile strength:** warp 260 N / 2,54 cm - weft 550 N / 2,54 cm  
**Thickness:** 0,26 mm

### MAGNETIC TAPE

- Magnetni trak z močnim lepilom za magnetiranje lahkih predmetov ali ustvarjanje magnetnega traku za lahke kovinske predmete
- Magnetic tape with strong adhesive to magnetise lightweight objects or create a magnetic strip for light, metal objects



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
MG2502	25 mm	2 m	schwarz/black	15	5407004563824

**Debelina:** 2,00 mm

**Thickness:** 2,00 mm

**INSULATION TAPE 5200**

- PVC izolacijski trak
- Primerno za električno izolacijo in številne druge namene
- Negorljiv
- PVC insulation tape
- Suitable for electrical insulation and a wide variety of other applications
- Flame retardant



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
IB1510	15 mm	10 m	schwarz/black	200	5425014220933
IL1510	15 mm	10 m	blau/blue	200	5425014221152
IR1510	15 mm	10 m	rot/red	200	5425014221176
IV1510	15 mm	10 m	grün/green	200	5407004561943
IW1510	15 mm	10 m	weiß/white	200	5425014221213
IY1510	15 mm	10 m	gelb/yellow	200	5425014221206
IB1910	19 mm	10 m	schwarz/black	200	8711347114412
IC1910	19 mm	10 m	gemischt/assorted (10 St./pcs)	20	8711347179534
IE1910	19 mm	10 m	gelb-grün/yellow-green	200	5425014223156
IG1910	19 mm	10 m	grau/grey	200	8711347114535
IL1910	19 mm	10 m	blau/blue	200	5425014220445
IR1910	19 mm	10 m	rot/red	200	5425014220452
IW1910	19 mm	10 m	weiß/white	200	5425014220469
IY1910	19 mm	10 m	gelb/yellow	200	5425014220476
IB5010	50 mm	10 m	schwarz/black	24	5425014220209
IB5033	50 mm	33 m	schwarz/black	24	5425014220223
IG5033	50 mm	33 m	grau/grey	24	5425014229042
IB10033	100 mm	33 m	schwarz/black	12	5425014220230

**Lepilo:** guma  
**Nosilni material:** PVC  
**Temperaturna odpornost:** 80 ° C  
**Natezna trdnost:** 62,5 N / 25 mm  
**Lepilna trdnost:** 4 N / 25 mm  
**Debelina:** 0,15 mm  
**Napetost okvare:** 6 kV

**Adhesive:** rubber  
**Carrier:** PVC  
**Maximum temperature:** 80°C  
**Tensile strength:** 62,5 N/25 mm  
**Adhesive strength:** 4 N/25 mm  
**Thickness:** 0,15 mm  
**Breakdown voltage:** 6 kV


**INSULATION TAPE 52100**

- Primerno za električno izolacijo ter za krepitev, zaščito in popravilo
- Zaviralec gorenja (razen XB1910)
- Z odobritvijo VDE (brez XB1910)
- Ročno uporabna za učenje
- Suitable for electrical insulation and for strengthening, protecting and repairing
- Flame retardant (excl. XB1910)
- With VDE approval (excl. XB1910)
- Hand tearable

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
XB1910	19 mm	10 m	schwarz/black	200	5425014225303
IB1920	19 mm	20 m	schwarz/black	250	5425014223613
IC1920	19 mm	20 m	gemischt/assorted (10 St./pcs)	25	5425014223682
IE1920	19 mm	20 m	gelb-grün/yellow-green	250	5425014223637
IG1920	19 mm	20 m	grau/grey	250	5425014223651
IL1920	19 mm	20 m	blau/blue	250	5425014223620
IR1920	19 mm	20 m	rot/red	250	5425014223644
IU1920	19 mm	20 m	braun/brown	250	5425014223675
IW1920	19 mm	20 m	weiß/white	250	5425014223668

**Lepilo:** guma  
**Nosilni material:** PVC  
**Temperaturna odpornost:** 90 °C  
**Lepilna trdnost:** 4 N / 25 mm  
**Debelina:** 0,15 mm  
**Napetost okvare:** 6 kV

**Adhesive:** rubber  
**Carrier:** PVC  
**Maximum temperature:** 90°C  
**Adhesive strength:** 4 N/25 mm  
**Thickness:** 0,15 mm  
**Breakdown voltage:** 6 kV

**INSULATION TAPE 52300**

- PVC izolacijski trak
- Primerno za električno izolacijo in široko paleto aplikacij
- PVC insulation tape
- Suitable for electrical insulation and a wide variety of applications



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
IB5020	50 mm	20 m	schwarz/black	100	5425014224832
IG5020	50 mm	20 m	grau/grey	100	5425014224856
IL5020	50 mm	20 m	blau/blue	100	5425014227253
IR5020	50 mm	20 m	rot/red	100	5425014225181
IW5020	50 mm	20 m	weiß/white	100	5425014224870
IY5020	50 mm	20 m	gelb/yellow	100	5425014225204

**Lepilo:** guma  
**Nosilni material:** PVC  
**Temperaturna odpornost:** 80 °C  
**Lepilna trdnost:** 4 N / 25 mm  
**Debelina:** 0,12 mm  
**Napetost okvare:** 5 kV

**Adhesive:** rubber  
**Carrier:** PVC  
**Maximum temperature:** 80°C  
**Adhesive strength:** 4 N/25 mm  
**Thickness:** 0,12 mm  
**Breakdown voltage:** 5 kV

**INSULATION TAPE 52400**

- PVC izolacijski trak
- Primerno za električno izolacijo in široko paleto aplikacij
- Odlično vodenje v hladnem vremenu
- PVC insulation tape
- Suitable for electrical insulation and a wide variety of applications
- Excellent cold weather handling



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
BI5010	50 mm	10 m	schwarz/black	100	5425014229073
GI5010	50 mm	10 m	grau/grey	100	5425014229158
LI5010	50 mm	10 m	blau/blue	100	5425014229172
RI5010	50 mm	10 m	rot/red	100	5425014229219
WI5010	50 mm	10 m	weiß/white	100	5425014229233
YI5010	50 mm	10 m	gelb/yellow	100	5425014229196

**Lepilo:** guma  
**Nosilni material:** PVC  
**Temperaturna odpornost:** 80 °C  
**Lepilna trdnost:** 3 N / 25 mm  
**Debelina:** 0,19 mm  
**Napetost okvare:** 7 kV

**Adhesive:** rubber  
**Carrier:** PVC  
**Maximum temperature:** 80°C  
**Adhesive strength:** 3 N/25 mm  
**Thickness:** 0,19 mm  
**Breakdown voltage:** 7 kV

**PTFE TAPE GAS**

- PTFE trak, primeren za tesnjenje navojnih povezav iz kovine ali plastike
- Temperaturno območje: -100 °C do +260 °C
- Primerno za plinske in vodovodne armature
- Oznaka kakovosti Gastec
- PTFE tape suitable for sealing threaded connections made from metal or plastic
- Temperature range: -100°C up to +260°C
- Suitable for gas and water fittings
- Gastec quality label



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
PT0012	12 mm	12 m	weiß (blister)/white (blister)	20	5425014227079
PT1212	12 mm	12 m	weiß/white	48	5425014221305

**Temperaturna odpornost:** 260 °C  
**Debelina:** 0,10 mm

**Maximum temperature:** 260°C  
**Thickness:** 0,10 mm

**PTFE TAPE WATER**

- PTFE trak, primeren za tesnjenje navojnih povezav iz kovine ali plastike
- Temperaturno območje: -100 °C do +260 °C
- Primerno samo za vodovodne armature
- PTFE tape suitable for sealing threaded connections made from metal or plastic
- Temperature range: -100°C up to +260°C
- Only suitable for water fittings



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
WT0012	2 x 12 mm	12 m	weiß (blister)/white (blister)	20	5425014227093
WT1212	12 mm	12 m	weiß/white	200	5425014227154

**Temperaturna odpornost:** 370 °C  
**Debelina:** 0,08 mm

**Maximum temperature:** 370°C  
**Thickness:** 0,08 mm




**SELF FUSION TAPE**

- Vulkanizacijski trak, ki po nanosu tvori homogeno maso, ne da bi se zvišala temperatura ali pritisk
- Primerno za izolacijo električnih kablov, tesnjenje cevi itd.
- Za začasna in trajna popravila
- Vulcanising tape that forms a homogeneous mass after application, without the need for heat or pressure
- Suitable for insulating electric cables, sealing hoses, etc.
- For temporary and permanent repairs

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
SF1910	19 mm	10 m	schwarz/black	10	5425014220162
SF2510	25 mm	10 m	schwarz/black	44	5407004560526

**Nosilni material:** PIB guma  
**Temperaturna odpornost:** 90 ° C  
**Natezna trdnost:** 2 mPa  
**Debelina:** 0,50 mm  
**Napetost okvare:** 21 kV

**Carrier:** PIB rubber  
**Maximum temperature:** 90°C  
**Tensile strength:** 2 mPa  
**Thickness:** 0,50 mm  
**Breakdown voltage:** 21 kV

**STRETCH & FUSE**

- Trajno, nepremočljivo tesnjenje
- Izolacija električnih žic
- Primerno za vse površine
- Ne pušča ostankov
- Enostaven za uporabo
- Odporen na tlak do 8 barov
- Permanent, waterproof sealing
- Insulation of electrical wires
- Suitable for all surfaces
- Leaves no residue
- Easy to use
- Pressure resistant up to 8 bar



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
SI2580	25 mm	1,80 m	transparent/transparent	8	5425014225860
SI2503	25 mm	3 m	transparent/transparent	6	5425014225884
SO2503	25 mm	3 m	rot/red	6	5425014225907
SZ2503	25 mm	3 m	schwarz/black	6	5425014225921

**Nosilni material:** Silikoni  
**Temperaturna odpornost:** 200 ° C  
 (začasno do 260 ° C)  
**Natezna trdnost:** 4,82 mPa  
**Debelina:** 0,50 mm  
**Napetost okvare:** 8 kV

**Carrier:** silicone  
**Maximum temperature:** 200°C (up to 260° C for short periods)  
**Tensile strength:** 4,82 mPa  
**Thickness:** 0,50 mm  
**Breakdown voltage:** 8 kV

## CABLE PROTECTION TAPE



- Samolepilni tekstilni trak
- Primerno za povezovanje in zaščito kablov, na primer v avtomobilih, za ozvočenje itd.
- Absorbiranje hrupa
- Kakovost OEM

- Self-adhesive textile tape
- Suitable for bundling and protecting cables, for example in cars, for sound systems, etc.
- Soundproofing
- OEM-quality

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
TP1900	5 x 19 mm	10 m	schwarz/black	10	5407004561264
TP1925	19 mm	25 m	schwarz/black	20	5425014221732

**Lepilo:** guma  
**Nosilni material:** poliester  
**Temperaturna odpornost:** 105 ° C  
**Natezna trdnost:** 80 N / 25 mm  
**Lepilna trdnost:** 10 N / 25 mm  
**Debelina:** 0,30 mm

**Adhesive:** rubber  
**Carrier:** polyester  
**Maximum temperature:** 105°C  
**Tensile strength:** 80 N/25 mm  
**Adhesive strength:** 10 N/25 mm  
**Thickness:** 0,30 mm

## CLOTH INSULATION TAPE



- Visokokakovostni laneni trak
- Primerno za povezovanje in zaščito kablov
- Zagotavlja prilagodljivo in trajno zaščito kablov
- Kakovost OEM

- High quality linen cloth tape
- Suitable for bundling and protecting cables
- Guarantees a flexible and durable cable protection
- OEM-quality

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
LI1925	19 mm	25 m	schwarz/black	48	5425014221275

**Lepilo:** guma  
**Nosilni material:** Tkanina, prevlečena s PE  
**Temperaturna odpornost:** 105 ° C  
**Natezna trdnost:** 200 N / 25 mm  
**Lepilna trdnost:** 6 N / 25 mm  
**Debelina:** 0,25 mm

**Adhesive:** rubber  
**Carrier:** PE coated cloth  
**Maximum temperature:** 105°C  
**Tensile strength:** 200 N/25 mm  
**Adhesive strength:** 6 N/25 mm  
**Thickness:** 0,25 mm

**PACKAGING TAPE (INDIVIDUAL)**


- Rjavi in prozorni embalažni trak
- Nizka raven hrupa
- Močna kakovost
- Ne vsebuje PVC

- Brown and transparent packaging tape
- Low noise
- Strong quality
- Does not contain PVC

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
VB5066	50 mm	66 m	braun/brown	36	5425014224276
VT5066	50 mm	66 m	transparent/transparent	36	5425014224290

**Lepilo:** Akril na vodni osnovi  
**Nosilni material:** Polipropilenski film  
**Temperaturna odpornost:** 60 ° C  
**Natezna trdnost:** 150 N / 25 mm  
**Lepilna trdnost:** 6 N / 25 mm  
**Debelina:** 0,06 mm

**Adhesive:** water-based acrylic  
**Carrier:** polypropylene film  
**Maximum temperature:** 60°C  
**Tensile strength:** 150 N/25 mm  
**Adhesive strength:** 6 N/25 mm  
**Thickness:** 0,06 mm

**PACKAGING TAPE FLATPACK (6 ROLLS)**


- Rjavi in prozorni embalažni trak
- Nizka raven hrupa
- Močna kakovost
- Ne vsebuje PVC

- Brown and transparent packaging tape
- Low noise
- Strong quality
- Does not contain PVC

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
VB5066P	50 mm	66 m	braun/brown	6	5407004561677
VT5066P	50 mm	66 m	transparent/transparent	6	5407004561639

**Lepilo:** Akril na vodni osnovi  
**Nosilni material:** Polipropilenski film  
**Temperaturna odpornost:** 60 ° C  
**Natezna trdnost:** 150 N / 25 mm  
**Lepilna trdnost:** 6 N / 25 mm  
**Debelina:** 0,06 mm

**Adhesive:** water-based acrylic  
**Carrier:** polypropylene film  
**Maximum temperature:** 60°C  
**Tensile strength:** 150 N/25 mm  
**Adhesive strength:** 6 N/25 mm  
**Thickness:** 0,06 mm

**PAPER PACKAGING TAPE**


- Okolju prijazen papirnat embalažni trak
- Brez topil

- Eco-friendly paper packaging tape
- Solvent free

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
VE4850	48 mm	50 m	braun/brown	36	5407004563350

**Lepilo:** sintetična guma  
**Nosilni material:** Kraft papir  
**Temperaturna odpornost:** 60 ° C  
**Natezna trdnost:** 112,5 N / 25 mm  
**Lepilna trdnost:** 21 N / 25 mm  
**Debelina:** 0,11 mm

**Adhesive:** synthetic rubber  
**Carrier:** kraft paper  
**Maximum temperature:** 60°C  
**Tensile strength:** 112,5 N/25 mm  
**Adhesive strength:** 21 N/25 mm  
**Thickness:** 0,11 mm

## PACKAGING TAPE BREEKBAAR/FRAGILE

• Embalažni trak z besedilom

• Packaging tape with text



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
VF5066	50 mm	66 m	orange-schwarz/orange-black	36	5407004561288

**Lepilo:** Akril na vodni osnovi  
**Nosilni material:** Polipropilenski film  
**Temperaturna odpornost:** 60 ° C  
**Natezna trdnost:** 112,5 N / 25 mm  
**Lepilna trdnost:** 6 N / 25 mm  
**Debelina:** 0,05 mm

**Adhesive:** water-based acrylic  
**Carrier:** polypropylene film  
**Maximum temperature:** 60°C  
**Tensile strength:** 112,5 N/25 mm  
**Adhesive strength:** 6 N/25 mm  
**Thickness:** 0,05 mm

## TAPE DISPENSER

• Razdeljevalnik trakov z zavoro, primeren za zvitke 50 mm x 66 m

• Tape dispenser with brake, suitable for rolls of 50 mm x 66 m



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
DT0001			/	20	5425014224313



### POWERPADS



- Izredno močne, dvostranske pritrilne blazinice za notranjo in zunanjo uporabo, primerne za gladke, hrapave in porozne površine
- Montaža brez žbljev ali vijakov
- Z ojačano tkanino
- Idealno za hitro in enostavno namestitev podstavkov, poštnih predalov, pločevine, ploščic itd.
- Primerno tudi za dekorativne okraske in okvirje iz poliuretana in polistirenske pene
- 10 blazinic na kuverto

- Extra strong, double sided mounting pads for indoor and outdoor use, suitable for smooth, rough and porous surfaces
- Mounting without nails or screws
- With reinforced fabric
- Perfect for fast and easy mounting of baseboards, letterboxes, sheet material, tiles, etc.
- Also suitable for decorative ornaments and frames made of polyurethane and polystyrene foam
- 10 pads per envelope

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
PA2040	20 mm	40 mm	semi-transp./semi-transp.	20	5407004560755

**Lepilo:** sintetična guma  
**Nosilni material:** Poliestrski film  
**Temperaturna odpornost:** 75 ° C  
**Lepilna trdnost:** 55 N / 25 mm  
**Debelina:** 0,80 mm

**Adhesive:** synthetic rubber  
**Carrier:** polyester film  
**Maximum temperature:** 75°C  
**Adhesive strength:** 55 N/25 mm  
**Thickness:** 0,80 mm

### REMOVABLE TRANSPARENT PADS



- Čisto odstranljive, prozorne, samolepilne blazinice
- Montaža brez žbljev ali vijakov
- 1 blazinica = 250g
- Za notranjo in zunanjo uporabo
- 15 blazinic na kuverto

- Cleanly removable, transparent, self adhesive pads
- Mounting without nails or screws
- 1 pad = 250g
- For both indoor and outdoor use
- 15 pads per envelope

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
HT2525	25 mm	25 mm	transparent/transparent	20	5407004561813

**Lepilo:** akril  
**Nosilni material:** Akrilna pena  
**Temperaturna odpornost:** 120 ° C  
**Lepilna trdnost:** 25 N / 25 mm  
**Debelina:** 0,50 mm

**Adhesive:** acrylic  
**Carrier:** acrylic foam  
**Maximum temperature:** 120°C  
**Adhesive strength:** 25 N/25 mm  
**Thickness:** 0,50 mm

### DOUBLE SIDED CARPET TAPE



- Dvostranski preprožni trak iz blaga
- Primerno za večino vrst preprog
- Zelo visoka lepilna trdnost
- Primerno za grobe površine
- Lahko se srga ročno

- Double sided carpet tape manufactured from cloth
- Suitable for most types of carpet
- Very high adhesive strength
- Suitable for rough surfaces
- Hand tearable

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
CT5005	50 mm	5 m	weiß/white	24	5425014224726

**Lepilo:** sintetična guma  
**Nosilni material:** Bombažna tkanina  
**Temperaturna odpornost:** 60 ° C  
**Natezna trdnost:** 80 N / 25 mm  
**Lepilna trdnost:** 27 N / 25 mm  
**Debelina:** 0,24 mm

**Adhesive:** synthetic rubber  
**Carrier:** cotton cloth  
**Maximum temperature:** 60°C  
**Tensile strength:** 80 N/25 mm  
**Adhesive strength:** 27 N/25 mm  
**Thickness:** 0,24 mm

## HPX 6200 REPAIR TAPE

- Zelo močan, univerzalni, visokokakovosten trak iz blaga z visoko lepilno trdnostjo
- Primerno za zavarovanje in popravilo cevi, vrtnih cevi itd.
- Lahko se strga ročno
- Vodoodporen in vremensko odporen
- Very strong, universal, high quality cloth tape with high adhesive strength
- Suitable for securing and repairing pipes, tubes, garden hoses, etc.
- Hand tearable
- Waterproof and weather resistant



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
CS5005	48 mm	5 m	schwarz/black	24	8711347125944
CB5005	48 mm	5 m	silber/silver	24	8711347179695
CW5005	48 mm	5 m	weiß/white	24	5425014222241

**Lepilo:** Naravna guma

**Nosilni material:** Tkanina, prevlečena s PE

**Temperaturna odpornost:** 60 ° C  
(začasno do 80 ° C)

**Natezna trdnost:** 183 N / 25 mm

**Lepilna trdnost:** 13 N / 25 mm

**Debelina:** 0,30 mm

**Adhesive:** natural rubber

**Carrier:** PE coated cloth

**Maximum temperature:** 60°C (up to 80°C  
for short periods)

**Tensile strength:** 183 N/25 mm

**Adhesive strength:** 13 N/25 mm

**Thickness:** 0,30 mm

## CAMO TAPE

- Samolepilni, vodoodporen tekstilni trak z visoko epilno trdnostjo
- Zelo močno
- Lahko se strga ročno
- Primerno za zunanjo uporabo
- 1001 aplikacija
- Self-adhesive, water resistant textile tape with high adhesive strength
- Very strong
- Hand tearable
- Suitable for outdoor use
- 1001 applications



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
CA5005	48 mm	5 m	tarnfarbig/camouflage	10	5425014225686

**Lepilo:** Naravna guma

**Nosilni material:** Tkanina, prevlečena s PE

**Temperaturna odpornost:** 60 ° C

**Natezna trdnost:** 157 N / 25 mm

**Lepilna trdnost:** 7 N / 25 mm

**Debelina:** 0,30 mm

**Adhesive:** natural rubber

**Carrier:** PE coated cloth

**Maximum temperature:** 60°C

**Tensile strength:** 157 N/25 mm

**Adhesive strength:** 7 N/25 mm

**Thickness:** 0,30 mm

## HSA DOUBLE SIDED TAPE

- Dvostranski akrilni trak z zelo visoko lepilno trdnostjo
- Posebej zasnovan za (težke) obrobe, znake, ojačevalce itd.
- Dober oprijem na kovino, steklo in večino plastične
- Prestavljivo (15 min)
- Double sided acrylic tape with very high adhesive strength
- Specially designed for (heavy) trims, signs, strengtheners, etc.
- Good adhesion to metal, glass and most plastics
- Repositionable (15 min)



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
HSA024	12 mm	2 m	anthrazit/anthracite	20	8711347125005
HSA025	19 mm	2 m	anthrazit/anthracite	20	8711347125029

**Lepilo:** akril

**Nosilni material:** Akrilna pena

**Temperaturna odpornost:** 93 ° C  
(začasno do 150 ° C)

**Lepilna trdnost:** 47 N / 25 mm

**Debelina:** 1,10 mm

**Adhesive:** acrylic

**Carrier:** acrylic foam

**Maximum temperature:** 93°C (up to 150°C  
for short periods)

**Adhesive strength:** 47 N/25 mm

**Thickness:** 1,10 mm

## POWER BOND



- Dvostranske blazinice iz akrilnega traku z zelo visoko lepilno trdnostjo
- Posebej zasnovana za napise, držala za telefon, vzvratna ogledala itd.
- Dober oprijem na kovino, steklo in večino plastike
- Prestavljivo (15 min)

- Double sided acrylic tape pads with very high adhesive strength
- Specially designed for signs, telephone holders, rearview mirrors, etc.
- Good adhesion to metal, glass and most plastics
- Repositionable (15 min)

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
PB1000			anthrazit/anthracite	20	5425014220346

**Lepilo:** akril  
**Nosilni material:** Akrilna pena  
**Temperaturna odpornost:** 93 ° C  
 (začasno do 150 ° C)  
**Lepilna trdnost:** 47 N / 25 mm  
**Debelina:** 1,10 mm

**Adhesive:** acrylic  
**Carrier:** acrylic foam  
**Maximum temperature:** 93°C (up to 150°C for short periods)  
**Adhesive strength:** 47 N/25 mm  
**Thickness:** 1,10 mm

## SIDE MOULDING TAPE



- Dvostranski penasti trak z visoko lepilno trdnostjo
- Zelo primeren za namestitve vseh vrst predmetov, kot so: okrasne letve, table itd.
- Dober oprijem na kovino, steklo in večino plastike
- Vremensko odporen, primeren za dolgotrajno uporabo na prostem

- Double sided foam tape with high adhesive strength
- Highly suitable for mounting all kinds of objects, such as: trims, signs, etc.
- Good adhesion to metal, glass and most plastics
- Weather resistant, suitable for long term outdoor use

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
ZC0023	12 mm	2 m	schwarz/black	20	8711347124985
ZC0025	19 mm	2 m	schwarz/black	20	8711347124947

**Lepilo:** akril  
**Nosilni material:** Polietilenska pena  
**Temperaturna odpornost:** 120 ° C  
**Lepilna trdnost:** 25 N / 25 mm  
**Debelina:** 1,00 mm

**Adhesive:** acrylic  
**Carrier:** polyethylene foam  
**Maximum temperature:** 120°C  
**Adhesive strength:** 25 N/25 mm  
**Thickness:** 1,00 mm

## ULTRA MOUNT TAPE



- Dvostranski, prozoren lepilni trak z zelo visoko lepilno trdnostjo
- Za namestitve dodatkov spojlerjev, logotipov, plastičnih trakov itd.
- Primerno za ABS, poliester in EPDM

- Double sided, transparent adhesive tape with very high adhesive strength
- For fitting spoiler accessories, logos, plastic strips, etc.
- Suitable for ABS, polyester and EPDM

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
ZC10	19 mm	1,5 m	transparent/transparent	20	8711347100002


**Lepilo:** Akrilno topilo  
**Nosilni material:** Poliestrski film  
**Temperaturna odpornost:** 100 ° C  
 (začasno do 200 ° C)  
**Lepilna trdnost:** 24 N / 25 mm  
**Debelina:** 0,20 mm

**Adhesive:** solvent acrylic  
**Carrier:** polyester film  
**Maximum temperature:** 100°C (up to 200° C for short periods)  
**Adhesive strength:** 24 N/25 mm  
**Thickness:** 0,20 mm

### ZIP FIX

- Zelo močan, samolepilni kavelj
- Primerno za lahke in težke obremenitve, na primer: preproge, avtomobilsko orodje, avdio oprema itd.
- Dober oprijem na kovino, steklo, les, keramiko in plastiko
- Primerno tudi za zunanjo uporabo

- Very strong, self-adhesive hook and loop tape
- Suitable for both light and heavy loads, for example: car mats, car tools, audio equipment, etc.
- Good adhesion to metal, glass, wood, ceramics and plastics
- Also suitable for outdoor use



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
ZF1000	20 mm	50 mm	schwarz/black	20	5425014220766
ZF2001	2 x 20 mm	1 m	schwarz/black	24	5425014222388

**Lepilo:** sintetična guma  
**Nosilni material:** Poliamidi  
**Temperaturna odpornost:** 100 °C  
**Debelina:** 1,50 mm

**Adhesive:** synthetic rubber  
**Carrier:** polyamide  
**Maximum temperature:** 100°C  
**Thickness:** 1,50 mm

### DUO GRIP

- Uspešno pritrjevanje s klikom: najboljšo pritrditev dobimo s pritiskom struktur kavljev do konca
- Primerno za lahke in težke obremenitve, na primer: preproge, avtomobilsko orodje, avdio oprema itd.
- Lahko prenese do petkrat večje obremenitve kot pri tradicionalnih povezavah "kavelj in zanka"

- Resecurable click-fastening action: the best attachment is obtained by pressing the hook structures fully together
- Suitable for both light and heavy loads, for example: car mats, car tools, audio equipment, etc.
- Can withstand loads up to five times greater than with traditional "hook and loop" connections



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
DG1000	25 mm	25 mm	schwarz/black	20	5425014220926
DG2500	25 mm	0,5 m	schwarz/black	20	5425014225488

**Lepilo:** sintetična guma  
**Nosilni material:** Poliamidi  
**Temperaturna odpornost:** 93 °C  
**Debelina:** 5,40 mm

**Adhesive:** synthetic rubber  
**Carrier:** polyamide  
**Maximum temperature:** 93°C  
**Thickness:** 5,40 mm

### ALUMINIUM TAPE

- Aluminijski trak za popravilo in vezavo kovin
- Primerno za začasno ali trajno lepljenje v ekstremnih okoliščinah
- Lahko se uporablja tudi pri nizkih temperaturah
- Odlična vzdržljivost

- Aluminium tape for repairing and binding of metal
- Suitable for temporary or permanent bonding under extreme circumstances
- Can also be used at low temperature
- Excellent durability



Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
ZC30	50 mm	5 m	aluminium/aluminium	24	8711347320004

**Lepilo:** Akrilno topilo  
**Nosilni material:** aluminij  
**Temperaturna odpornost:** 120 °C  
**Natezna trdnost:** 55 N / 25 mm  
**Lepilna trdnost:** 20 N / 25 mm  
**Debelina:** 0,08 mm

**Adhesive:** solvent acrylic  
**Carrier:** aluminium  
**Maximum temperature:** 120°C  
**Tensile strength:** 55 N/25 mm  
**Adhesive strength:** 20 N/25 mm  
**Thickness:** 0,08 mm



## REFLECT TAPE



- Samolepilni odsevni trak
- Za boljšo vidljivost in večjo varnost v temi ali ob slabem vremenu
- Močno odsevna
- Primerno za označevanje avtomobilske opreme, koles, motorjev itd.

- Self-adhesive reflective tape
- For better visibility and greater safety in the dark or during bad weather
- Highly reflective
- Suitable for marking car accessories, bicycles, motorcycles, etc.

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
ZC11	19 mm	1,5 m	reflektierend gelb/reflective yellow	20	8711347110001

**Lepilo:** Akrilno topilo  
**Nosilni material:** Tkanina, prevlečena s PE  
**Temperaturna odpornost:** 82 ° C  
**Lepilna trdnost:** 15 N / 25 mm  
**Debeline:** 0,11 mm

**Adhesive:** solvent acrylic  
**Carrier:** PE coated cloth  
**Maximum temperature:** 82°C  
**Adhesive strength:** 15 N/25 mm  
**Thickness:** 0,11 mm

## INSULATION TAPE 5200



- PVC izolacijski trak za univerzalno uporabo
- Primerno za električno izolacijo in za številne druge namene
- Negorljive

- PVC insulation tape for universal use
- Suitable for electrical insulation and for a wide variety of other applications
- Flame retardant

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
IT1910	19 mm	10 m	1 schwarz/black, 1 rot/red	20	8711347173297

**Lepilo:** guma  
**Nosilni material:** PVC  
**Temperaturna odpornost:** 80 ° C  
**Natezna trdnost:** 62,5 N / 25 mm  
**Lepilna trdnost:** 4 N / 25 mm  
**Debeline:** 0,15 mm  
**Napetost okvare:** 6 kV

**Adhesive:** rubber  
**Carrier:** PVC  
**Maximum temperature:** 80°C  
**Tensile strength:** 62,5 N/25 mm  
**Adhesive strength:** 4 N/25 mm  
**Thickness:** 0,15 mm  
**Breakdown voltage:** 6 kV

## SELF FUSION TAPE



- Vulkanizacijski trak, ki po nanosu tvori homogeno maso brez potrebe po toploti ali pritisku
- Primerno za izolacijo električnih kablov, tesnjenje cevi itd.
- Za začasna in trajna popravila

- Vulcanising tape that forms a homogeneous mass after application, without the need for heat or pressure
- Suitable for insulating electric cables, sealing hoses, etc.
- For temporary and permanent repairs

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
SF2503	25 mm	3 m	schwarz/black	20	5425014220179

**Nosilni material:** PIB guma  
**Temperaturna odpornost:** 90 ° C  
**Natezna trdnost:** 2 mPa  
**Debeline:** 0,50 mm  
**Napetost okvare:** 21 kV

**Carrier:** PIB rubber  
**Maximum temperature:** 90°C  
**Tensile strength:** 2 mPa  
**Thickness:** 0,50 mm  
**Breakdown voltage:** 21 kV

### CABLE PROTECTION TAPE



- Samolepilni tekstilni trak
- Primerno za povezovanje in zaščito kablov, na primer v avtomobilih, za ozvočenje itd.
- Zvočna izolacija
- Kakovost OEM
- Self-adhesive textile tape
- Suitable for bundling and protecting cables, for example in cars, for sound systems, etc.
- Soundproofing
- OEM-quality

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
TP1910	19 mm	10 m	schwarz/black	20	5425014220254

**Lepilo:** guma  
**Nosilni material:** poliester  
**Temperaturna odpornost:** 105 ° C  
**Natezna trdnost:** 80 N / 25 mm  
**Lepilna trdnost:** 10 N / 25 mm  
**Debeline:** 0,30 mm

**Adhesive:** rubber  
**Carrier:** polyester  
**Maximum temperature:** 105°C  
**Tensile strength:** 80 N/25 mm  
**Adhesive strength:** 10 N/25 mm  
**Thickness:** 0,30 mm

### MIRROR REPAIR KIT



- Komplet v sili za popravilo funkcije ogledala
- Primerno za avtomobile, tovornjake in vsa druga vozila
- Enostaven rez, brez posebnega orodja
- Ne sme se uporabljati kot trajna zamenjava originalnega ogledala!
- Emergency kit to repair the mirror function
- Suitable for cars, trucks and any other vehicle
- Easy to cut, no special tools needed
- Not to be used as permanent replacement of the original mirror!

Št. izdelka Art. No.	premer width	dolžina length	barva colour	Pakiranje Pack.	koda EAN EAN code
MR1725	175 mm	250 mm	silber/silver	24	5407004562872

**TAPE & STRIPING REMOVER/TAPE & STRIPING REMOVER**

- Sintetični disk, primeren za odstranjevanje oblog in ostankov z nalepk in dvostranskega traku
- Ne poškoduje podlage
- Prihranek časa
- Idealna hitrost: 1200 vrt / min
- Synthetic disk suitable for removing trims and residues from stickers and double sided tape
- Does not damage the substrate
- Time-saving
- Ideal speed: 1200 rpm



Št. izdelka Art. No.	opis description	Pakiranje Pack.	koda EAN EAN code
ZCRE04	Scheibe + Achse/Disc + axle	20	5425014221756
ZCRE07	Scheibe + Achse (groß)/disc + axle (large)	10	5425014223071







DP0062

APBG1605



WB0019



RM00037



**MASKING 4900  
EXTRA STRONG**  
• Very strong miter tape  
• High adhesive strength  
• No residue (6 months)



D0022



**P.O.S. CATALOG/KATALOG P.O.S.**

Če želite povečati vidnost izdelkov HPX v svoji trgovini, vam je na voljo več zaslonov. Če želite pridobiti več informacij o teh možnostih prodajnega mesta, se lahko vedno obrnete na nas ali prenesete katalog POS s spodnjo QR kodo.

If you want to increase visibility of the HPX products in your store, there are several displays at your disposal. If you would like to obtain more information about these point of sale possibilities, you can always contact us or download the P.O.S. catalog using the QR-code below.





**AUTOMOTIVE CONCEPTS**



**PRO CONCEPTS**



**DIY CONCEPTS**



**CONSTRUCTION CONCEPTS**



●●● : idealno / zelo primerno | ●● : primeren | ● : zmerno primeren | X : ni primeren / neprimeren

DUCT TAPES	Stran	Kovina	umetne mase	PE/PP	Les	Steklo	Kamen/Beton	Notranja uporaba	Zunanja uporaba	Odporen na UV žarke
HPX 6200 REPAIR TAPE	4, 44	●●●	●●●	●●●	●●●	●	●	●●●	●●●	Nekaj dni
PRO DUCT TAPE ORANGE	4	●●●	●●●	●●●	●●	●	●	●●●	●●●	Nekaj dni
DUCT TAPE 2200	5	●●●	●●●	●●●	●●	●	●	●●●	●●●	Nekaj dni
DUCT TAPE 1900	5	●●●	●●●	●●●	●●	●	●	●●●	●●●	Nekaj dni
GAFFER TAPE MATT BLACK	6	●●●	●●●	●●●	●●●	●	●	●●●	●●●	Nekaj dni
MATT GAFFER TAPE PRO	6	●●●	●●●	●●●	●●●	●	●	●●●	●●●	Nekaj dni
GAFFER TAPE FLUO	7	●●●	●●●	●●●	●●●	●	●	●●●	●●●	Nekaj dni
FLUO GAFFER TAPE PRO	7	●●●	●●●	●●●	●●●	●	●	●●●	●●●	Nekaj dni
GAFFER 6000 TAPE 'SOUND AND LIGHT'	8	●●●	●●●	●●●	●●●	●	●	●●●	●●●	Nekaj dni
ALL WEATHER TAPE	8	●●●	●●●	●●●	●●	●●●	●	●●●	●●●	Dolgotrajno
AGRITAPE	9	●●●	●●●	●●●	●●	●	●	●●●	●●●	Dolgotrajno

MONTAŽNI TRAKOVI	Stran	Kovina	umetne mase	PE/PP	Les	Steklo	Kamen/Beton	Notranja uporaba	Zunanja uporaba	Breme
MAX POWER TRANSPARENT	10	●●●	●●●	X	●●	●●●	X	●●●	●●●	●●●
MAX POWER OUTDOOR	10	●●●	●●●	X	●●	●●●	X	●●●	●●●	●●●
HSA HIGH STRENGTH ACRYLIC 3200	11, 44	●●●	●●●	X	●●	●●●	X	●●●	●●●	●●●
SIDE MOULDING TAPE	11, 45	●●●	●●●	X	●●	●●●	X	●●●	●●●	●●
MIRROR MOUNTING TAPE	12	●●●	●●●	X	●●●	●●●	X	●●●	●●●	●●
DOUBLE SIDED MOUNTING TAPE 3MM	12	●●●	●●●	X	●●●	●●●	X	●●●	●●●	●●
DOUBLE SIDED MOUNTING TAPE	12	●●●	●●●	●●	●●●	●●●	X	●●●	● (začasno)	●●
DOUBLE SIDED MOUNTING TAPE BLACK	13	●●●	●●●	X	●●●	●●●	X	●●●	●●●	●●
ULTRA MOUNT TAPE	13, 45	●●●	●●●	X	●●●	●●●	X	●●●	●●●	●●
MULTI TACK DOUBLE SIDED MOUNTING TAPE	14	●●●	●●●	●●●	●●●	●●	●●●	●●●	●●●	●●
MULTI TACK DOUBLE SIDED MOUNTING TAPE - LED PROFILE	14	●●●	●●●	●●●	●●●	●●	●●●	●●●	●●●	●●
DOUBLE SIDED CARPET TAPE	15, 43	●●●	●●●	●	●●●	●●●	X	●●●	●●●	●●●
DOUBLE SIDED TAPE	15	n.a. n.a.	●●●	●●●	●●●	n.a. n.a.	●	●●●	X	X
DOUBLE SIDED TISSUE TAPE	15	●●●	●●●	●●	●●●	●●●	X	●●●	●	X
EXPO CARPET TAPE	16	n.a. n.a.	●●	●●	●●	n.a. n.a.	X	●●●	X	X
EMBLEM PRESS & MOUNT	16	n.a. n.a.	●●●	●●●	●●●	n.a. n.a.	●●	●●●	X	X
ZIP FIX	17, 46	●●	●●	●	X	●●	X	●●●	●●●	●
DUO GRIP	17, 46	●●●	●●●	●	●●●	●	X	●●●	●●●	●●
BACKGRIP	18	●●●	●●●	X	●●●	●●●	X	●●●	●●●	●●

Te informacije o izdelku, kolikor nam je znano, temeljijo na praktičnih izkušnjah. Te informacije o izdelku so podane v dobri veri, vendar si mora uporabnik zagotoviti, da so navedeni. Uporabnik sam je odgovoren za odločitev, ali izdelek za določeno zmogljivost izdelka zadostuje za njegovo aplikacijo. Option Tape Specialties NV ne more biti namen in vrsta uporabe uporabnika. Zgornji podatki so odgovorni za okvaro izdelka, razen če ni bilo opravljeno popolno preskušanje. Naročnik se mora odločiti za povprečne vrednosti in niso primerni za specifikacijo. Ne da bi se podrobneje seznanili s trakovi, primernimi za lastno uporabo.

●●● : idealno / zelo primerno | ●● : primeren | ● : zmerno primeren | X : ni primeren / neprimeren

TESNILNI TRAKOVI	Stran	Kovina	umetne mase	PE/PP	Les	Steklo	Kamen/Beton	Notranja uporaba	Zunanja uporaba
BUTYL SEALING TAPE	19	●●	●●	●	●	●●	●●	●●●	●●●
POWER SEALING TAPE	19	●●●	●●●	●●●	●●	●●●	●●	●●●	●●●
ALUBUTYL	20	●●	●●	●●●	●●●	●●	●●	●●●	●●●

TRAJNI ZRAČNO-PROIZVODNI IZDELKI	Stran	Kovina	umetne mase	PE/PP	Les	Notranja uporaba	Zunanja uporaba	Prilagodljivost	Odpornost proti staranju
AIRTIGHT FLEX	21	●●●	●●●	●●●	●●●	●●●	●●	●●●	●●●
AIRTIGHT UV	22	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●
AIRTIGHT INDOOR	22	●●●	●●●	●●●	●●●	●●●	●	●	●●●
AIRTIGHT ROOF	23	●●●	●●●	●●●	●●●	●●●	●●●	●	●●●
AIRTIGHT FIX	23	●●●	●●●	●●●	●●●	●●●	●	●	●●●

MASKIRNI TRAKOVI	Stran	Kovina	umetne mase	Les	Steklo	Kamen/Beton	Notranja uporaba	Zunanja uporaba	Odporen na UV žarke
MASKING TAPES 100°C	24	●●●	●●●	●●●	●●●	●	●●●	●	začasno
MASKING TAPES 60°C	24	●●●	●●●	●●●	●●●	●	●●●	●	začasno
MASKING 4800 DELICATE SURFACES	25	●●●	●●●	●●●	●●●	X	●●●	●●	4 mesece
MASKING 4400 FINE LINE	25	●●●	●●●	●●●	●●●	X	●●●	●●●	6 mesecev
MASKING 4900 EXTRA STRONG	26	●●●	●●●	●●●	●●●	●●●	●●●	●●●	6 mesecev
MASKING TAPE UV	26	●●●	●●●	●●●	●●●	●	●●●	●●●	14 dni
EASY MASK	27	●●●	●●●	●●●	●●●	●	●●●	X	nekaj dni
EASY MASK FINE LINE	28	●●●	●●●	●●●	●●●	X	●●●	●●●	6 mesecev
EASY MASK OUTDOOR	28	●●●	●●●	●●●	●●●	●●	●●●	●●	1 mesec
PRO COVER	29	●●●	●●●	●●●	●●●	●●	●●●	●●●	1 mesec
PVC ORANGE	29	●●●	●●●	●●●	●	●●	●●●	●●	nekaj dni
CLEAN REMOVAL TAPE	29	●●●	●●●	●●●	X	●●●	●●●	X	nekaj dni
PVC FORM WORK TAPE	30	●●●	●●●	●●●	●	●●●	●●●	●●●	nekaj dni
TRIM MASKING TAPE	30	●●●	●●●	X	●●●	X	●●●	X	N/A
FINE LINE TAPE	30	●●●	●●●	●●●	●●●	X	●●●	X	N/A

Te informacije o izdelku so podane po naših najboljših močeh in temeljijo na praktičnih izkušnjah. Uporabnik je odgovoren za odločitev, ali je izdelek primeren za določen namen in za vrsto uporabe uporabnika. Zgornji podatki predstavljajo povprečne vrednosti in niso primerni za specifikacijo. Brez temeljitega testiranja družba Option Tape Specialties NV ne odgovarja za okvaro izdelka.



●●● : idealno / zelo primerno | ●● : primeren | ● : zmerno primeren | X : ni primeren / neprimeren

VARNOSTNI IN OZNAČEVALNI TRAKOVI	Stran	Gladke površine	Porozne površine	Notranja uporaba	Zunanja uporaba
SAFETY TAPE	31	●●●	●	●●●	●●●
SAFETY TEXTILE TAPE	31	●●●	●	●●●	●●
HEAVY DUTY MARKING TAPE	31	●●●	●	●●●	●●●
LANE MARKING TAPE	32	●●●	●	●●●	●●●
BARRIER TAPE	32	n.a. n.a.	n.a. n.a.	●●●	●●●
SUPER BARRIER TAPE	32	n.a. n.a.	n.a. n.a.	●●●	●●●
SAFETY GRIP	33	●●●	●	●●●	●●●
AQUA GRIP	33	●●●	●	●●●	●●●

SPECIALNI TRAKOVI	Stran	Kovina	umetne mase	PE/PP	Les	Steklo	Kamen/Beton	Notranja uporaba	Zunanja uporaba
CAR PAINT PROTECTION FILM	34	●●●	●●	X	X	●●●	X	●●●	●●●
BLACK PROTECTION FILM	34	●●●	●●	X	X	●●●	X	●●●	●●●
ALU TAPE	35, 46	●●●	●●●	●	●	X	X	●●●	●●●
DRYWALL JOINTING TAPE	35	●●●	●●	●	●●	n.a. n.a.	n.a. n.a.	●●●	●

IZOLACIJSKI TRAKOVI	Stran	Debelina	Napetost okvare	Temperaturna odpornost	Zaviranje gorenja	Tlačni Razred	Notranja uporaba	Zunanja uporaba
INSULATION TAPE 5200	36, 47	0,15 mm	6 kV	+80°C	ja yes	n.a. n.a.	●●●	●●●
INSULATION TAPE 52100	37	0,15 mm	6 kV	+90°C	ja yes	n.a. n.a.	●●●	●●●
INSULATION TAPE 52300	37	0,12 mm	5 kV	+80°C	ja yes	n.a. n.a.	●●●	●●●
INSULATION TAPE 52400	38	0,19 mm	7 kV	+80°C	ja yes	n.a. n.a.	●●●	●●●
PTFE TAPE GAS	38	0,10 mm	n.a. n.a.	+260°C	n.a. n.a.	0,2 bar	●●●	●●●
PTFE TAPE WATER	38	0,10 mm	n.a. n.a.	+260°C	n.a. n.a.	n.a. n.a.	●●●	●●●
SELF FUSION TAPE	39, 4	0,50 mm	21 kV	+90°C	n.a. n.a.	n.a. n.a.	●●●	●
STRETCH & FUSE	39	0,50 mm	8 kV	+200°C (začasno: + 260 ° C)	n.a. n.a.	8 bar	●●●	●●●
CABLE PROTECTION TAPE	40,48	0,30 mm	n.a. n.a.	+105°C	n.a. n.a.	n.a. n.a.	●●●	X
CLOTH INSULATION	40	0,25 mm	n.a. n.a.	+105°C	n.a. n.a.	n.a. n.a.	●●●	X

Te informacije o izdelku je dano v dobra vera, toda uporabnik bi morali zagotovim sam, da je uspešnost the izdelka je zadostuje za njegovo aplikacijo. Opcijski trak Specialties NV ne more biti odgovoren za okvaro izdelka, če ni bilo opravljeno popolno preskušanje. Naročnik se mora sam odločiti o ustreznosti trakov za lastno uporabo.





Offices & Production site  
Temse - Belgium

[www.hpx.eu](http://www.hpx.eu) - [info@hpx.eu](mailto:info@hpx.eu)